
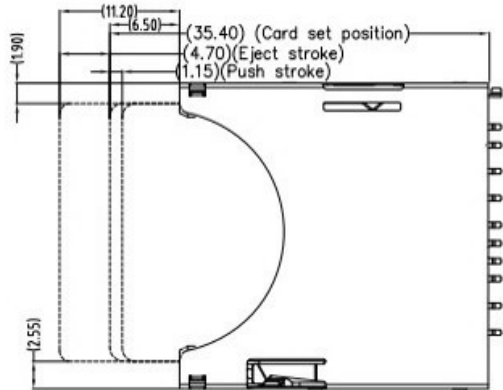
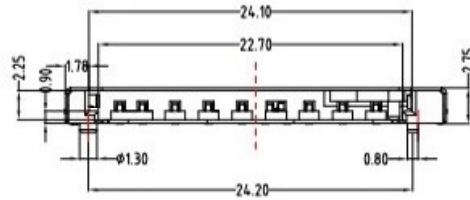
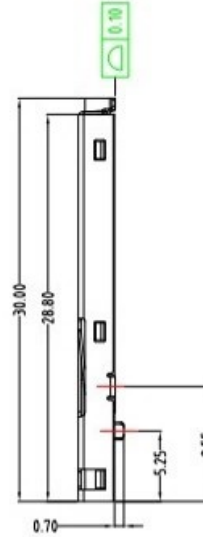


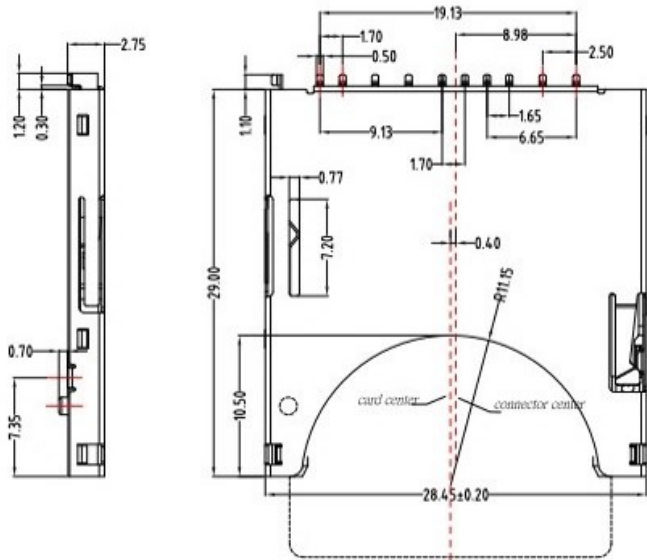

Pin No.	SD	MM*
P1	MMC&SD#1 SD<DAT3	1P 7P
P2	MMC&SD#2 SD<CMD	2P 2P
P3	MMC&SD#3 SD<VSS1	3P 3P
P4	MMC&SD#4 SD<VDD	4P 4P
P5	MMC&SD#5 SD<CLK	5P 5P
P6	MMC&SD#6 SD<VSS2	6P 6P
P7	MMC&SD#7 SD<DAT0	7P 1P
P8	SD<DAT1	8P
P9	SD<DAT2	9P


SPECIFICATION

Electrical :


- 1.Current Rating: 0.5mA AC / DC Max
- 2.Voltage Rating: 125V AC / DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1,000 MΩ Min.

Environmental:

- 1.Operating Temperature: -20℃ ~ +90℃.

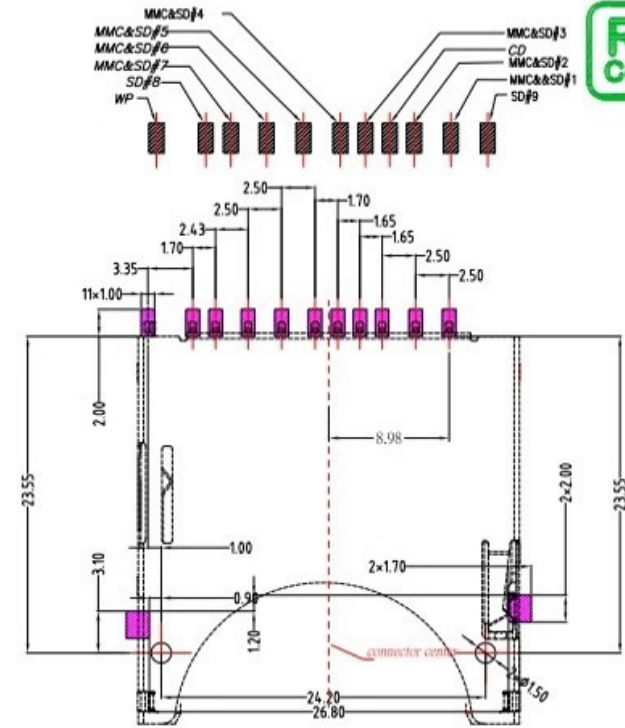

PCB LAYOUT

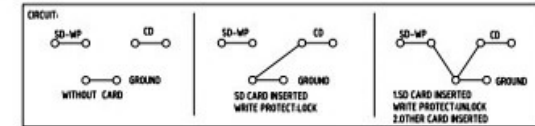

Material:

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
06/24/19
DATE
06/24/19
DATE
06/24/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
1 of 1

CONNECTOR
CARD CONNECTOR
SD-001-001-S267
PART NO. SD-001-001-S267

SIZE
A4
VER
R2

ITEM NO.
2
1

DESCRIPTION
更新圖面
更新圖面

DRAWN
Jack
Jack

DATE
06/24/19
08/10/18