

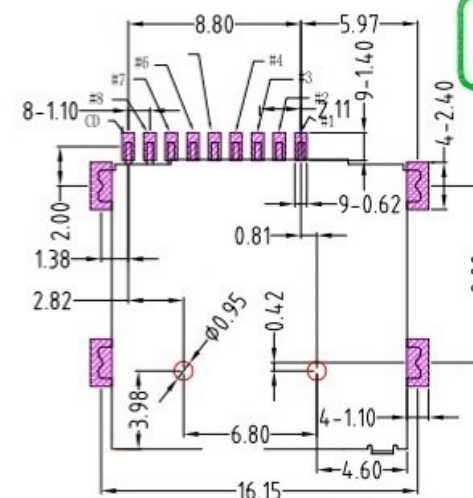

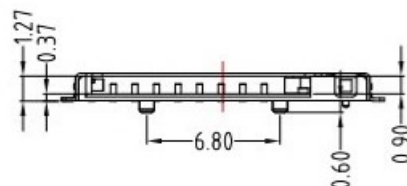
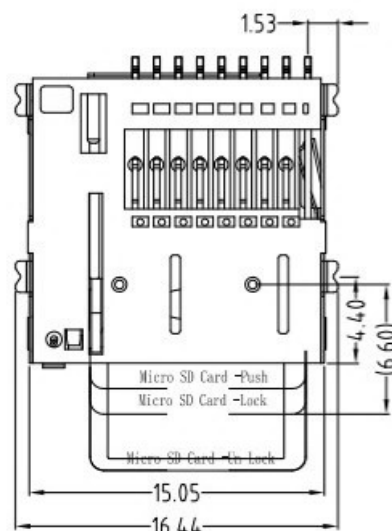


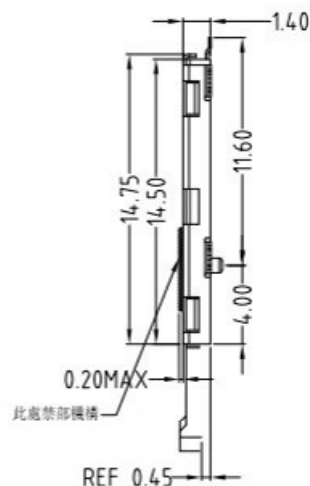

1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.Shell: Nickel under Plated surface layer

PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1
9#	CD



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MIM

DRAWN BY:	DATE
Jack Lu	06/03/2017

CHECKED BY:	DATE
Jacky Chen	06/03/2012

APPROVED BY:	DATE:
Tony Kao	06/03/2006

DATE _____

06/03/2

DATE _____

06/03/

DATE _____

06/03/20

[illegible]

MAT L

FINISH

SCALE

SHEET N

[illegible]

FILE

MODI E

DWG NO

PART NO.

[illegible]

CONNECTOR

T Flash 卡座 F

--	--

SD-1F21-131Z

SD-TE21-1317

	SIZE
--	------

	A4
	VGR

R
