

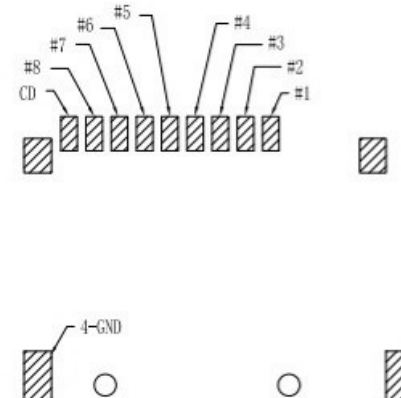
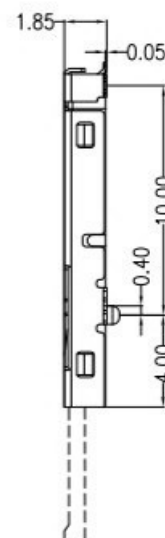


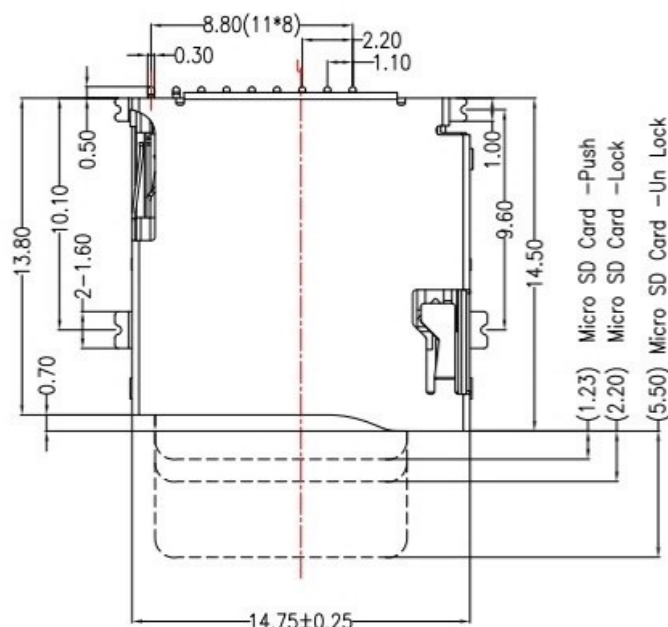

PIN ASSIGNMENT

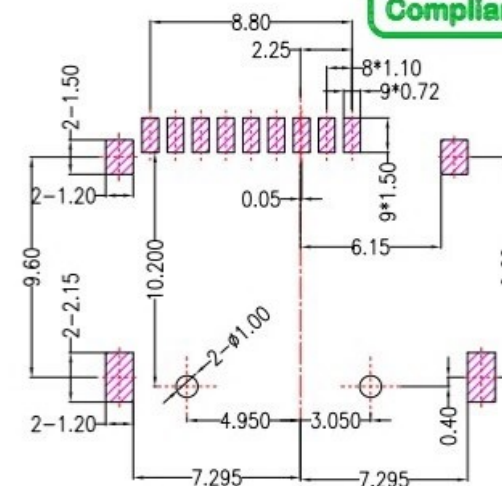

PCB LAYOYT

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5mA AC / DC Max
- 2.Voltage Rating: 12V AC / DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1,000 MΩ Min.

Environmental:



- 1.Operating Temperature: -20°C ~ +60°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

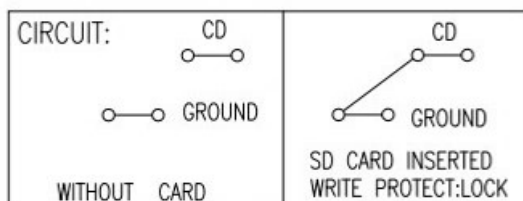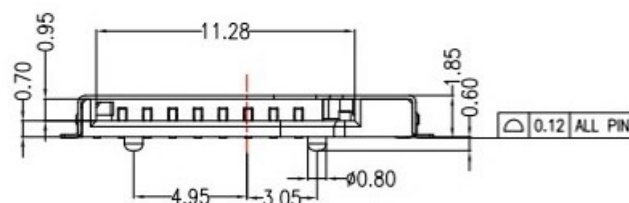

PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

6	更新樣式	Jack	010821
5	更新圖面	Jack	050520
4	更新尺寸	Jack	011118
3	更新尺寸	Jack	011018
2	更新圖面	Jack	010518
1	更新料號	Jack	122316
ITEM NO	DESCRIPTION	DRAWN	DATE

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	01/08/21		MODLE	T Flash 卡座 PUSH
CHECKED BY:	DATE	FINISH	DWG NO.	SD-TF21-406-S304
Jacky Chen	01/08/21		PART NO.	SD-TF21-406-S304
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	01/08/21	SHEET NO.	1 of 1	