

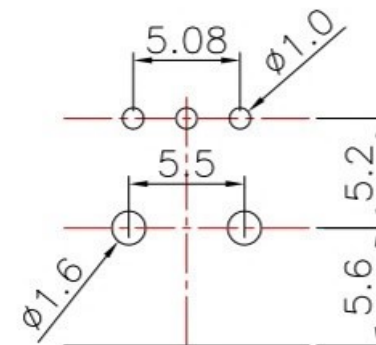
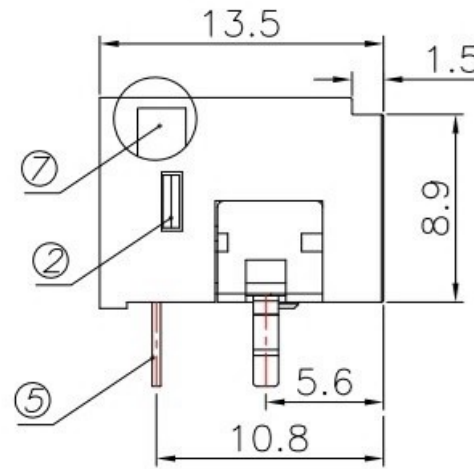


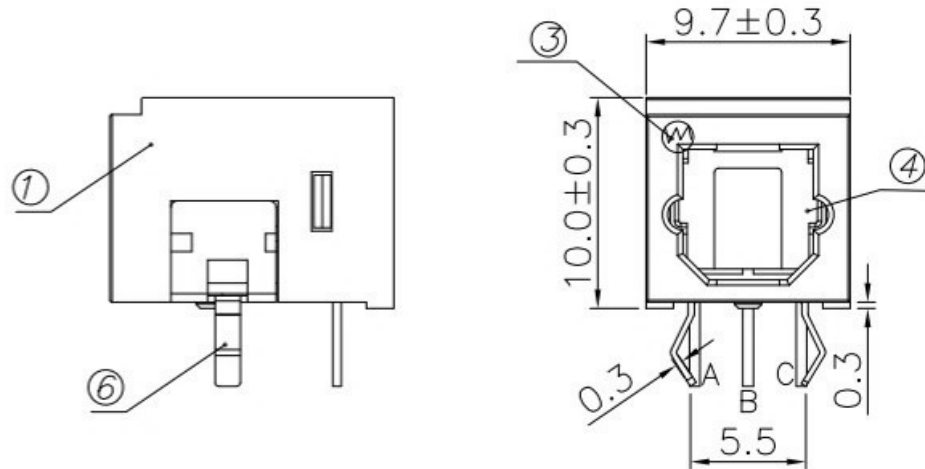

PCB LAYOUT

OJ-416E-XXx-S214

TX	1	16 Mbps
RX	2	25 Mbps



RECEIVER

OJ-416E-RX



TRANSMITTER

OJ-416E-TX

SPECIFICATIONS:

1. DISSIPATION CURRENT: 5.0 mA.
2. PERATING VOLTAGE(V_{CC}): 2.7-5.5 V.
3. INSERTION FORCE: 4.0Max Kgs
4. EXTRACTION FORCE: 0.6Kgs TO 4.0 Kgs
5. ENDURANCE: 500 CYCLEs
6. OPERATING TEMPERATURE: -25 TO +85 °C.

⑦	COVER 2	PBT	BLACK COLOR	1
⑥	SHELL	SPCC	Cu+Ni+Sn	1
⑤	IC	BRASS		1
④	COVER 1	PBT	BLACK COLOR	1
③	SPRING	SUS		1
②	HOUSING	PBT	BLACK COLOR	1
①	HOUSING	PBT	BLACK COLOR	1
ITEM	DESCRIPTION	MATERIAL	PLATING&COLOR	QTY



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 08/11/20

CHECKED BY: DATE

Jacky Chen 08/11/20

APPROVED BY: DATE

Tony Kao 08/11/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

JACK

OPTICAL JACK

OJ-416E-XXx-S214

OJ-416E-XXx-S214

SIZE

VER

R