

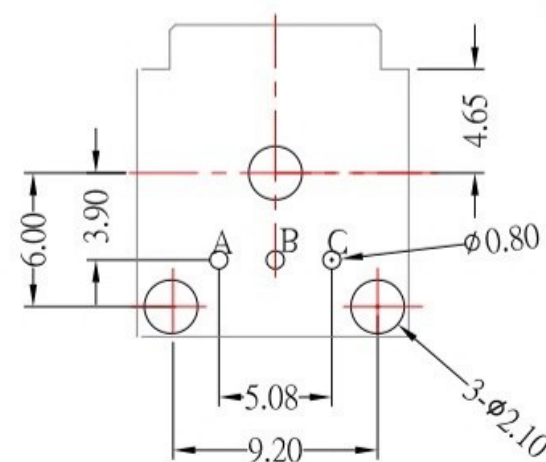
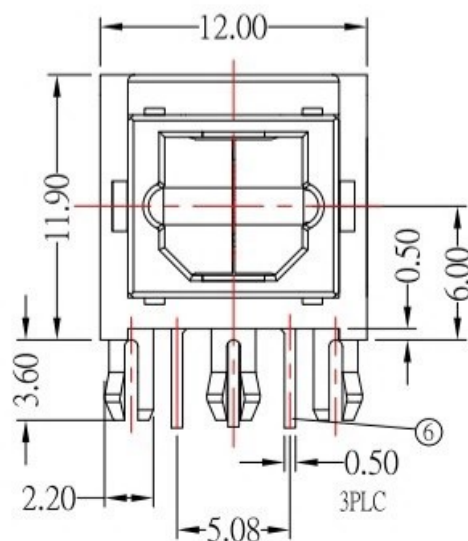
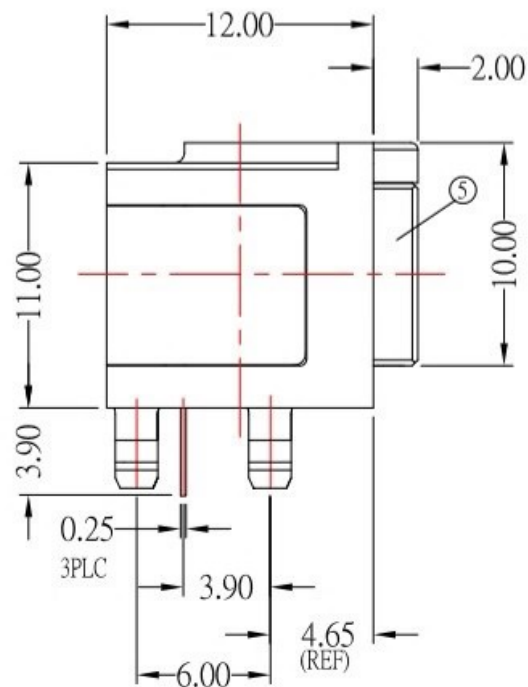



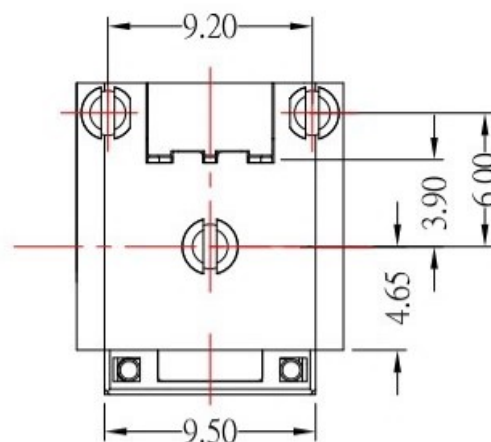

PCB LAYOUT
TOP VIEW

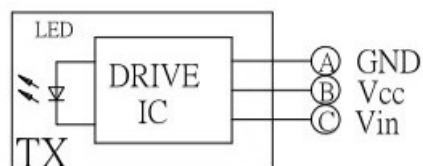

SPECIFICATIONS:

1. DISSIPATION CURRENT: 5.0 mA.
2. OPERATING VOLTAGE(Vcc): 2.7-5.5 V.
3. INSERTION FORCE: 4.0Max Kgs
4. EXTRACTION FORCE: 0.6Kgs TO 4.0 Kgs
5. ENDURANCE: 500 CYCLES
6. OPERATING TEMPERATURE: -25 TO +70 °C.

⑥	TX UNIT	25M		1
⑤	COIL SPRING	SUS		2
④	GATE	PA9T	GREEN COLOR	2
③	FRAME	PA9T	BLACK COLOR	1
②	COVER	PA9T	BLACK COLOR	1
①	HOUSING	PA9T	BLACK COLOR	1
ITEM	DESCRIPTION	MATERIAL	PLATING&COLOR	Q'TY




东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/22/19

MAT'L

TITLE

JACK

CHECKED BY:

Jacky Chen

DATE

11/22/19

FINISH

MODLE

OPTICAL JACK(發射端)

APPROVED BY:

Tony Kao

DATE

11/22/19

SCALE

1 : 1

DWG NO.

OJ-418-TX2-S214

SHEET NO.

1 of 1

PART NO.

OJ-418-TX2-S214

SIZE

A4

VER

R1

ITEM NO.

DESCRIPTION

DRAWN

DATE

112219

Jack

112219