

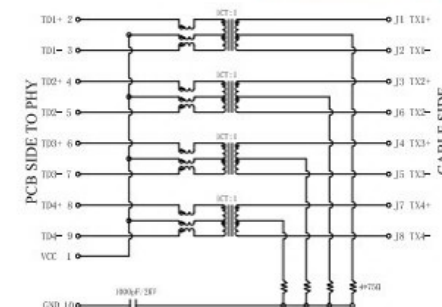

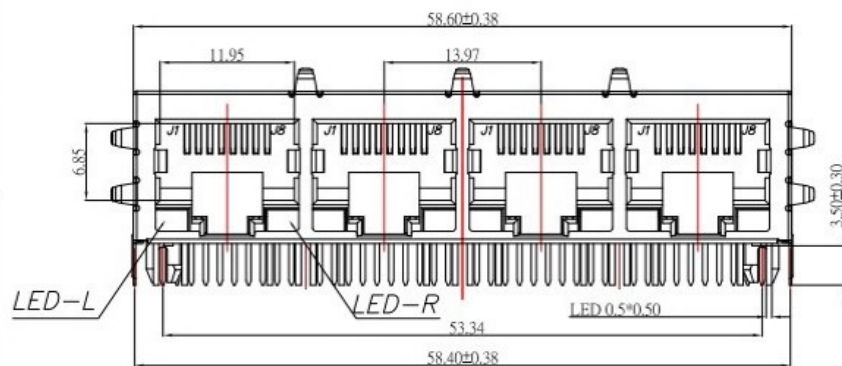


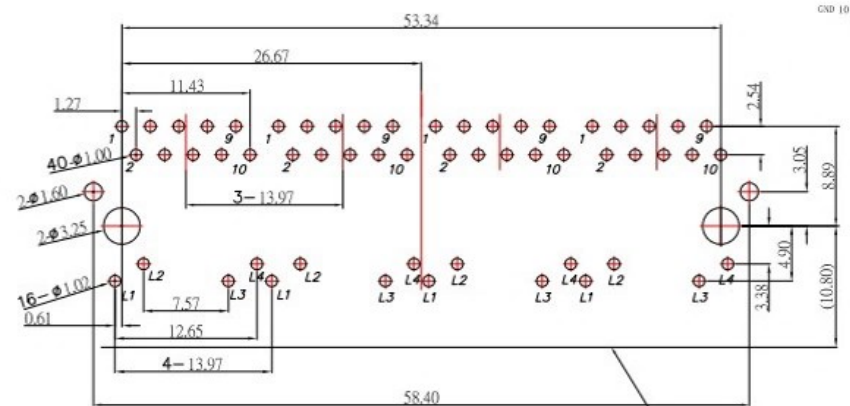

SCHEMATIC

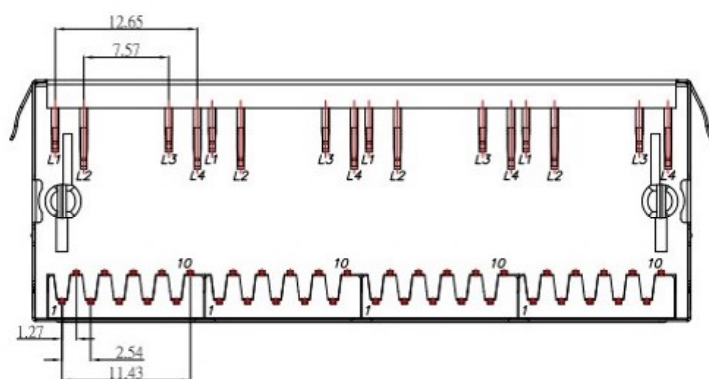

Product Edge


PCB LAYOUT MOUNTING PATTERN

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

ELECTRICAL SPECIFICATIONS AT 25°C

INSERTION LOSS db max	Return Loss dB min				Crosstalk(db TYP)			Common Mode Rejection (dB TYP)		Hpot(vrms)
	1-100MHz	1-30MHz	30-60MHz	60-80MHz	1-30MHz	30-60MHz	60-80MHz	1-50MHz	50-150MHz	
-1.0	-18	-16	-12	-30	-30	-30	-30	-30	-30	1500



SPECIFICATIONS

Material:

- 1.Housing : PBT ,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS

Environmental:

- 1.Operation Temperature : 0°C ~ +70°C



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/25/19

MAT'L

TITLE

RJ45

CHECKED BY:

Jacky Chen

DATE

11/25/19

FINISH

MODLE

RJ45 1x4 PORT WTRANSFORMER 1001000BASE
WLED YGY

APPROVED BY:

Tony Kao

DATE

11/25/19

SCALE

1 : 1

DWG NO.

MJ45-4QA7FA-YGY-S307

SHEET NO.

1 of 1

PART NO.

MJ45-4QA7FA-YGY-S307

SIZE

A4

VER

R