
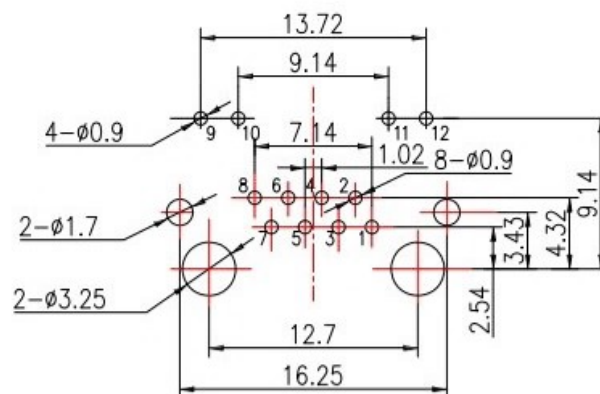

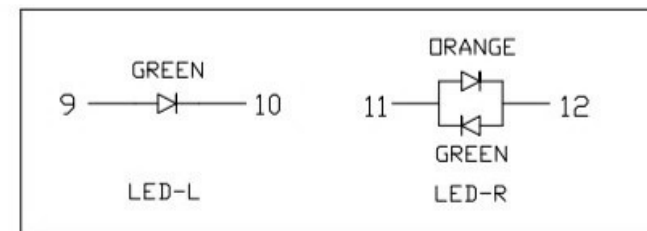
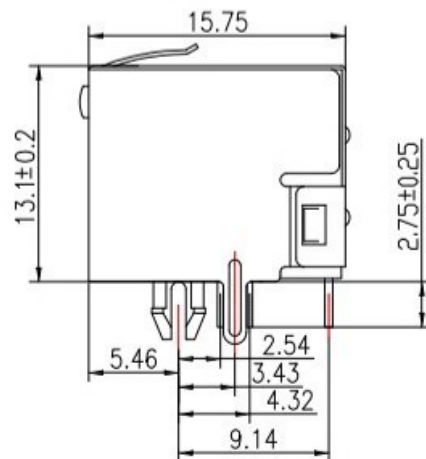


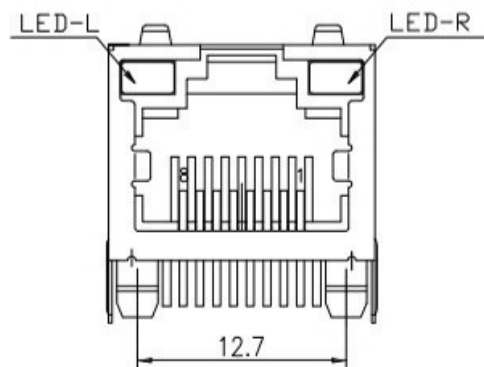

PCB LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1,000 VAC RMS 50 HZ 1 MIN

Mechanical:

- 1.Housing : PBT
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Copper Alloy , Nickel Plated

Environmental:

- 1.Operation Temperature : -20°C ~ +70°C
- 2.Storage Temperature : -40°C ~ +85°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 01/16/20

CHECKED BY: Jacky Chen
DATE: 01/16/20

APPROVED BY: Tony Kao
DATE: 01/16/20

MAT'L	TITLE	RJ45
FINISH	MODLE	RJ45 1X1 屏蔽背部双弹 带灯 左绿右橙绿
SCALE	1 : 1	DWG NO. RJ45-5JA81B-GOG-S307
SHEET NO.	1 of 1	PART NO. RJ45-5JA81B-GOG-S307

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新LED端子編號	Jack	01/16/20