
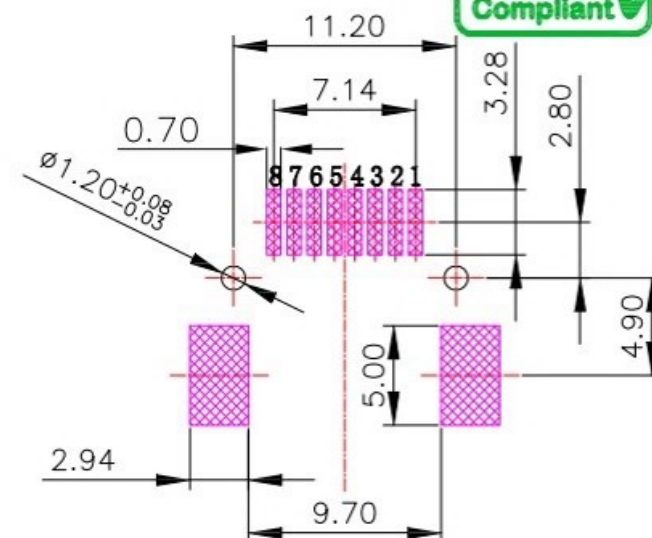
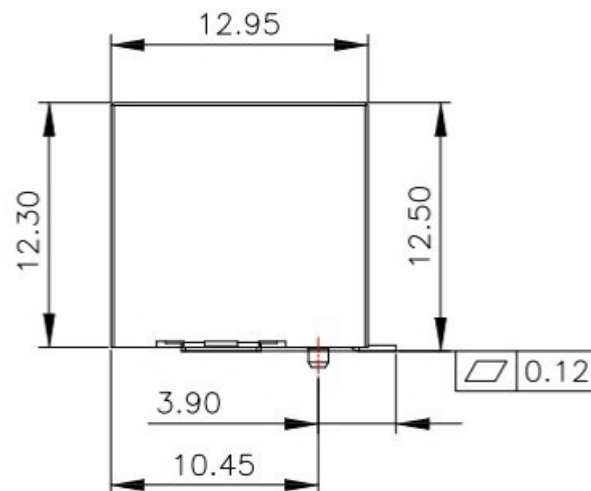


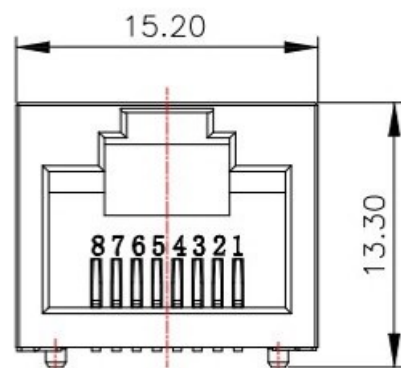

PCB LAYOUT MOUNTING PATTERN

NOTE :

- 1.Housing: PA6T,Black
- 2.Contact: Phosphor Bronze
- 3.Stator: Copper Alloy
- 4.Contact Plating : Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 5.Stator : Nickel under Plated surface layer

Electrical:

- 1.Voltage Rating : 125VAC
- 2.Current Rating : 1.5 A Max
- 3.Insulation Resistance : 1000 M Ω MIN
- 4.Dielectric Strength : 1000 VAC
- 5.Contact Resistance : 20 m Ω MAX


Environmental:

- 1.Operating Temperature : -40°C ~ +85°C

RJ45-4183M051-x-S118

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

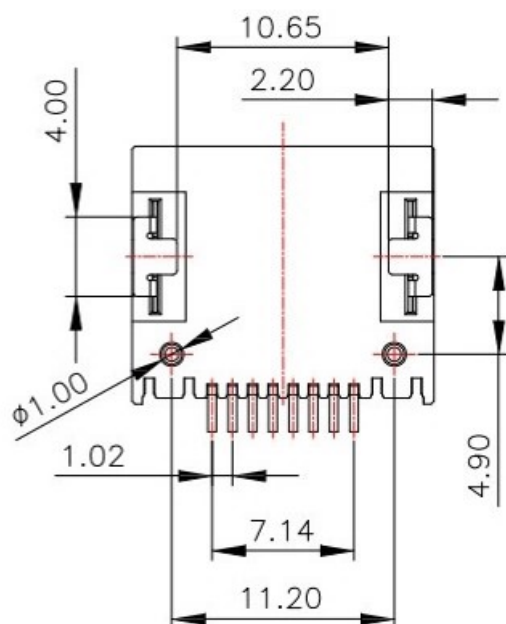

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 02/06/18

CHECKED BY: Jacky Chen
DATE: 02/06/18

APPROVED BY: Tony Kao
DATE: 02/06/18

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

RJ45

RJ45

RJ45-4183M051-x-S118

RJ45-4183M051-x-S118

SIZE

VER

R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增pcb layout尺寸	Jack	020618