

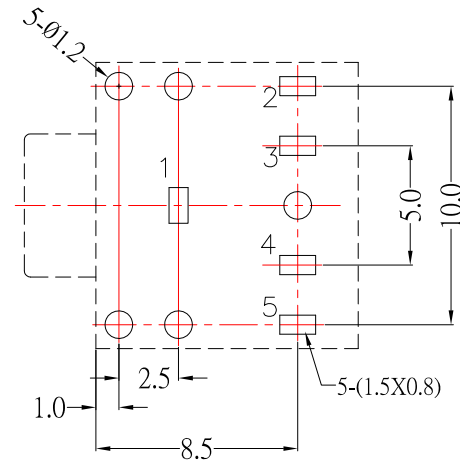
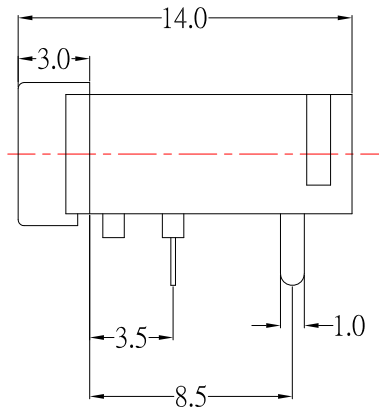
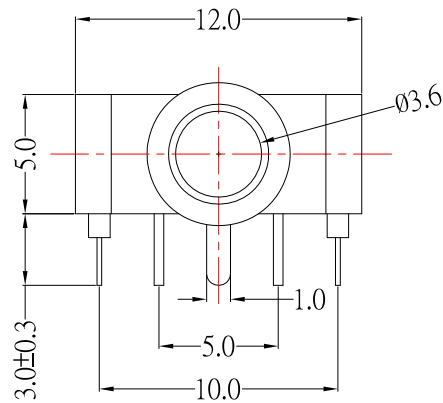
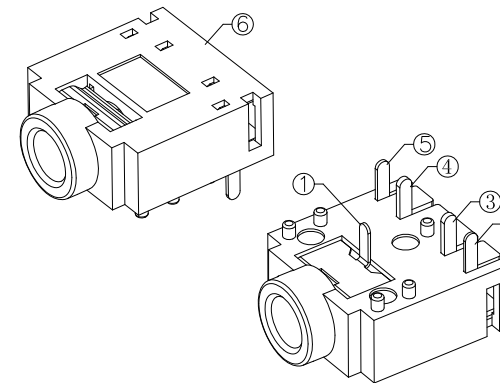


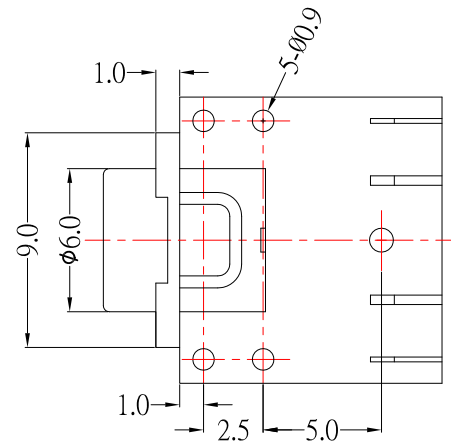

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

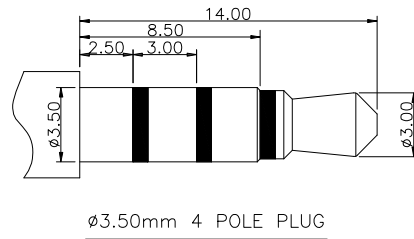

SPECIFICATION

- Rating : DC 30V , 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles .

SCHEMATIC

PJ-3615-S124	PJ-3614-S124	PJ-3614A-S124	PJ-3613-S124	PJ-3613A-S124

6	HOUSING	1	PBT	
5	CONTACT FOOT #5	1	Phosphor Bronze	Sn-Plating
4	CONTACT FOOT #4	1	Brass	Sn-Plating
3	CONTACT FOOT #3	1	Brass	Sn-Plating
2	CONTACT FOOT #2	1	Stainless Steel	Sn-Plating
1	CONTACT FOOT #1	1	Phosphor Bronze	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/24/18	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-361x-S124
Jacky Chen	05/24/18	1 : 1	PART NO.	PJ-361x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	05/24/18			

SIZE
A4
VER
R1