



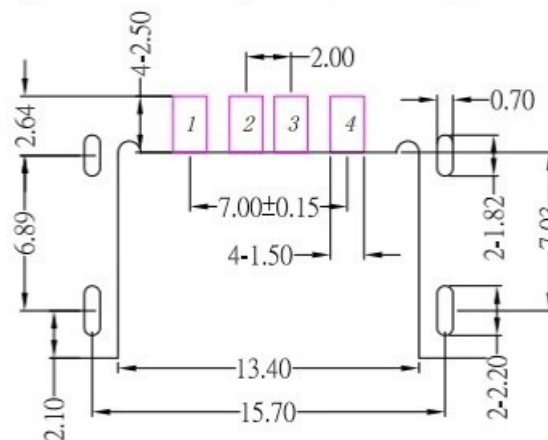



SUA-110E28-x-S236

Color :

White : W
Black : B

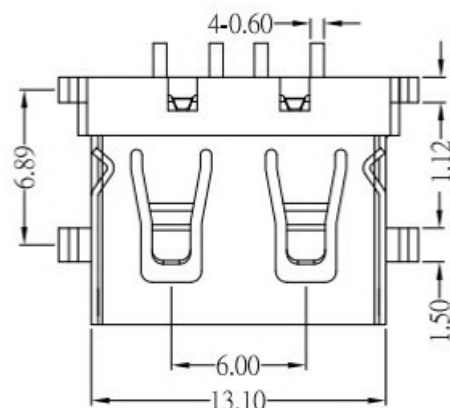

RECOMMENDED PCB LAYOUT

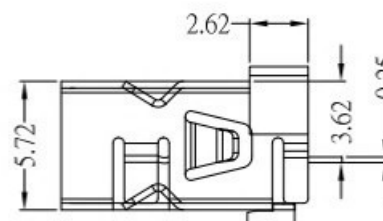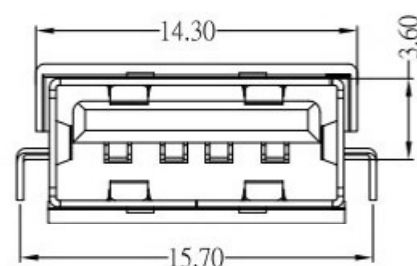

SPECIFICATIONS

Electrical:

- 1.Voltage Current Rating: 2.0 A, 30VDC
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V AC

Material:

- 1.Housing: Thermoplastic
- 2.Contact: Phosphor Bronze
- 3.Shell: Copper Alloy

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 06/17/20

CHECKED BY: Jacky Chen
DATE: 06/17/20

APPROVED BY: Tony Kao
DATE: 06/17/20

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB AF SMT 沉板正向 H3.60mm無捲邊
SCALE	DWG NO.	SUA-110E28-x-S236
SHEET NO.	PART NO.	SUA-110E28-x-S236

ITEM NO. DESCRIPTION DRAWN DATE

SIZE
A4
VER
R