



SUA-110P13Cx-x-S236

SHELL :

Blank : BRASS


1 : SPCC

鍍層厚度 :

Blank : 1u"

2 : 15u"

3 : 30u"

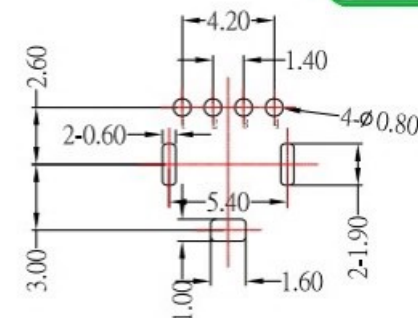

PCB LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Rated Current: 2.0 A Max
- 2.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: PBT
- 2.Contact: PhosphorBronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 05/12/20

CHECKED BY: DATE

Jacky Chen 05/12/20

APPROVED BY: DATE

Tony Kao 05/12/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF 側插短體無捲邊 L=10.40mm

SUA-110P13Cx-x-S236

SUA-110P13Cx-x-S236

SIZE

VER

R