

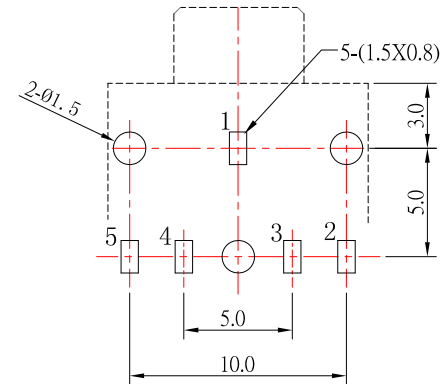
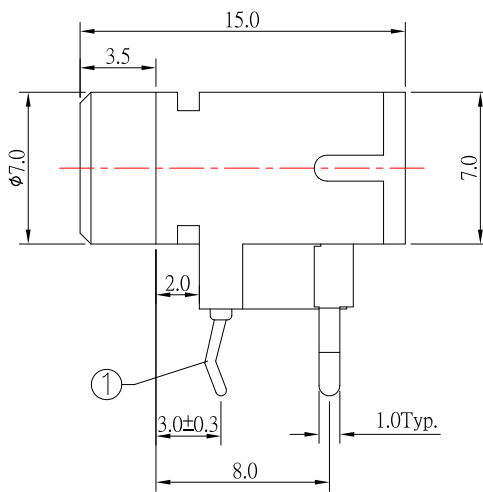
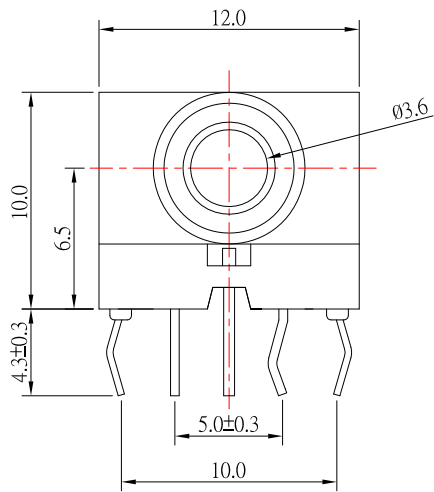


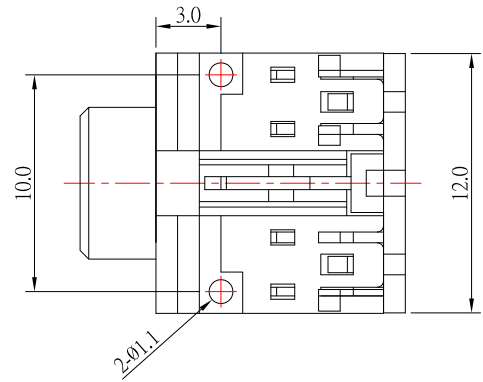


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

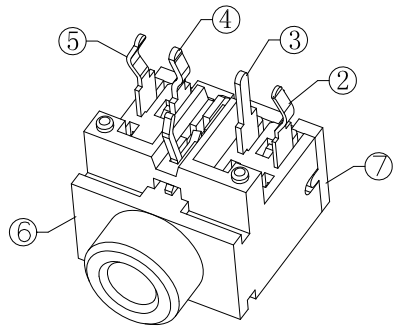

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles .

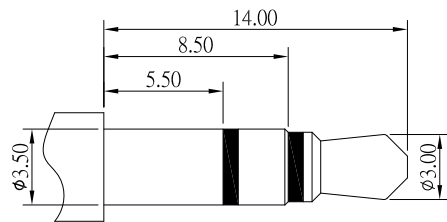

ø3.50mm 3 POLE PLUG

SCHEMATIC	PJ-3565-S124	PJ-3564A-S124	PJ-3563-S124

7	COVER	1	PBT	
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
09/05/18
DATE
09/05/18
DATE
09/05/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-356x-S124
PJ-356x-S124

SIZE
A4
VER
A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新樣式	Jack	090518
2	更新為A0版	Jack	011017
1	更新SPEC	Jack	122916