

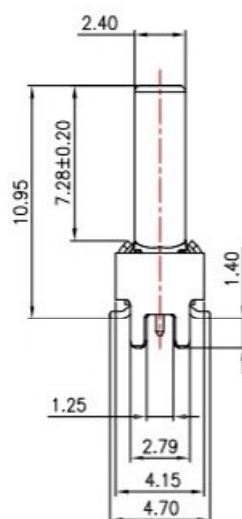



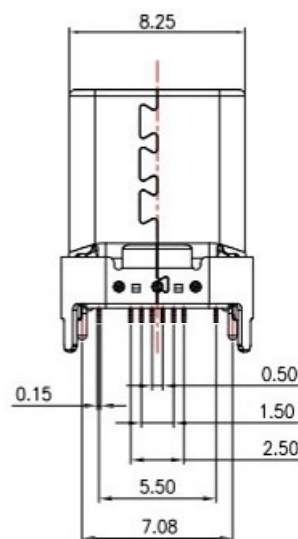

SBC-161VSE-20x-S277

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

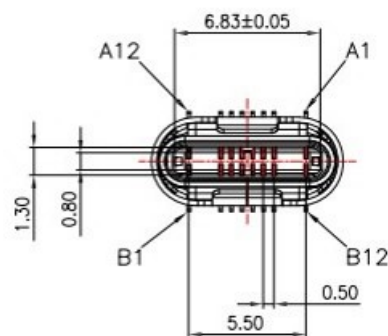



SPECIFICATIONS

Material:


- 1.Housing: High Temperature Thermoplastic
- 2.Contact: Copper Alloy
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

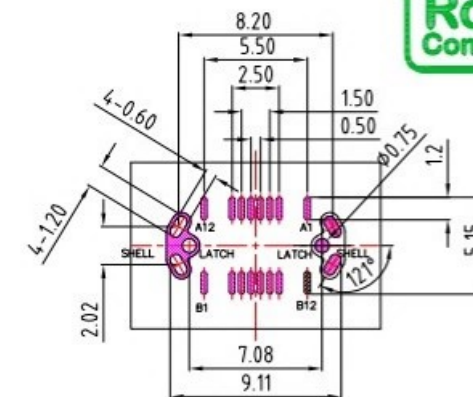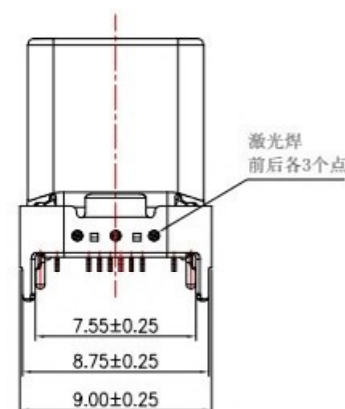

RECOMMENDED P.C.B. LAYOUT

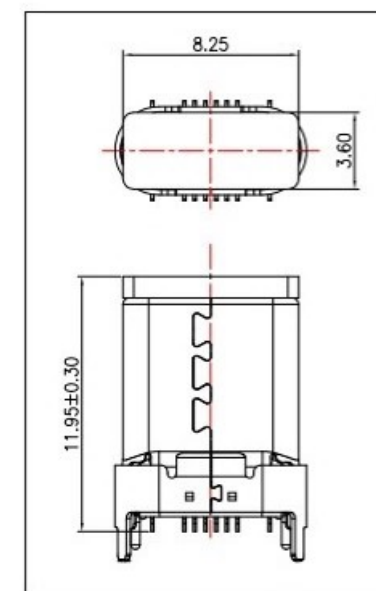

PINS DESCRIPTION PLUG FRONT VIEW

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			POWER		GND		POWER	POWER			GND
GND			POWER	POWER		GND		POWER			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/16/19

CHECKED BY:

Jacky Chen

DATE

12/16/19

APPROVED BY:

Tony Kao

DATE

12/16/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB C TYPE 2.0 Male 直立式短體 SMT 16PIN(12+4pin)

SBC-161VSE-20x-S277

SBC-161VSE-20x-S277

SIZE

A4

VER

R

ITEM NO

DESCRIPTION

DRAWN

DATE

Jack

121619