

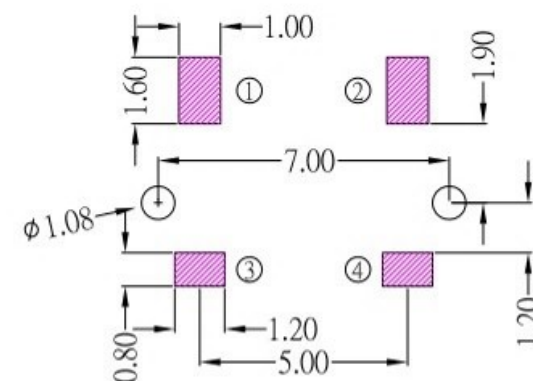
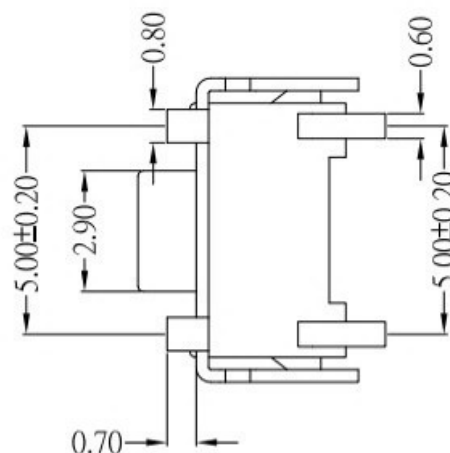



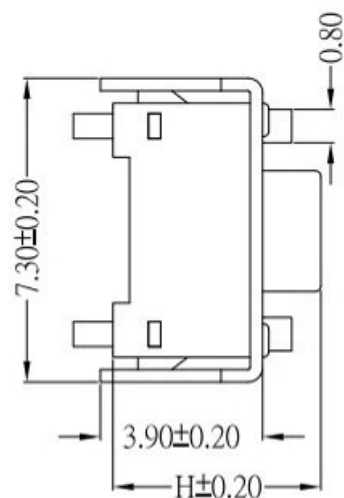

P.C.B LAYOUT MOUNTING PATTERN

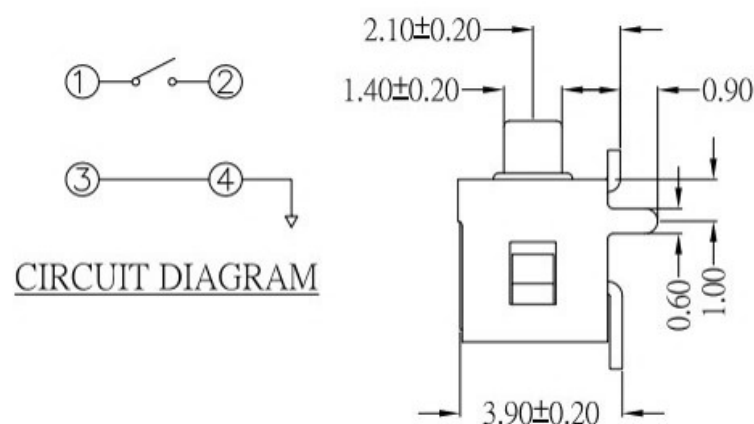

TS-A01VSx-xx-S428

MODEL NO.	TS-A01VS	TS-A01VSL	TS-A01VSA
H (mm)	4.30	4.50	5.00

Knob Color :

B: Black

Operating Force

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.10mm		
Operating Force	1 120±30gf	2 180±50gf	3 250±50gf
Operating Life (cycles)	50,000		30,000

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	Tin plated
B	BASE	1	PPA (Black)	
A	STEM	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 03/22/21

CHECKED BY: Jacky Chen
DATE: 03/22/21

APPROVED BY: Tony Kao
DATE: 03/22/21

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH
SCALE	1 : 1	DWG NO.	TS-A01VSx-xx-S428
SHEET NO.	1 of 1	PART NO.	TS-A01VSx-xx-S428

SIZE
A4
VER
R