

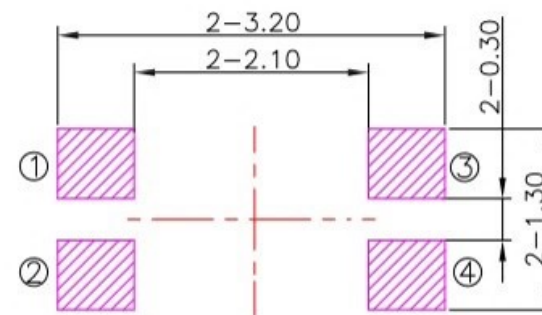

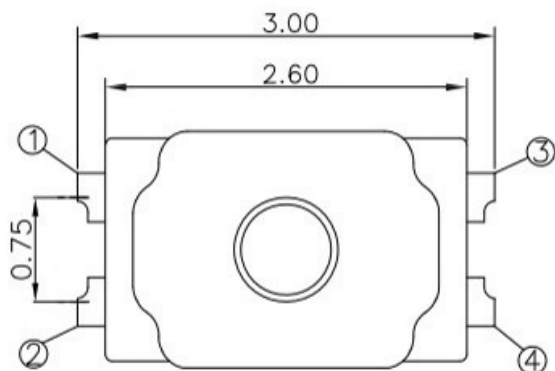





P.C.B LAND PATTERN

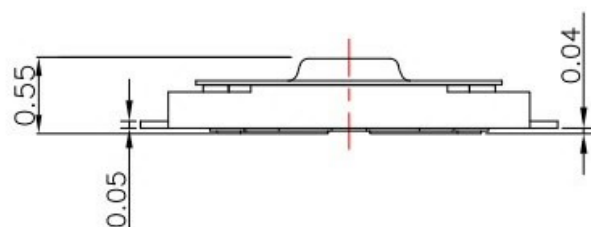

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.11±0.05mm
Dielectric Withstanding Voltage	AC 250 V(50~60Hz)
Contact Resistance	100mΩ Max.
Operating Force	2 160 ± 50gf 3 260 ± 50gf
Operating Life(cycles)	200,000

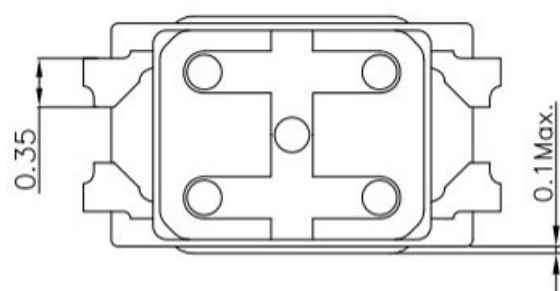

E	KNOB	1	POLYAMIDE(Black)	
D	FILM	1	POLYAMIDE(White)	
C	CONTACT	1	SUS	Ag plated
B	BASE	1	POLYAMIDE(Black)	
A	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 07/03/20

CHECKED BY: DATE

Jacky Chen 07/03/20

APPROVED BY: DATE

Tony Kao 07/03/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A30-x-S410

TS-A30-x-S410

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE