


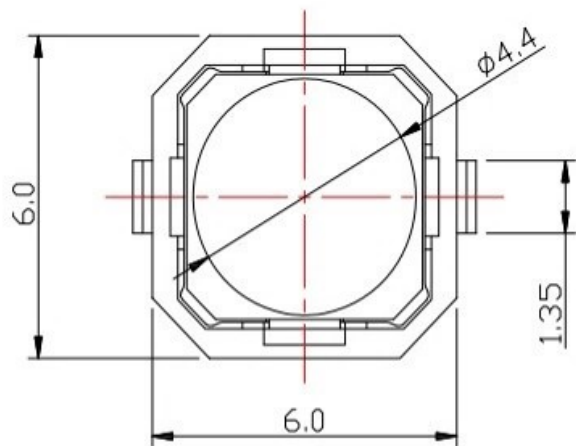


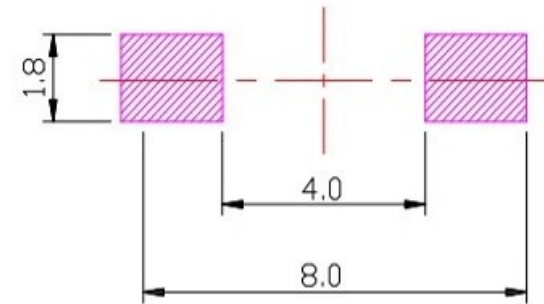

CIRCUIT DIAGRAM



P.C.B LAYOUT MOUNTING PATTERN

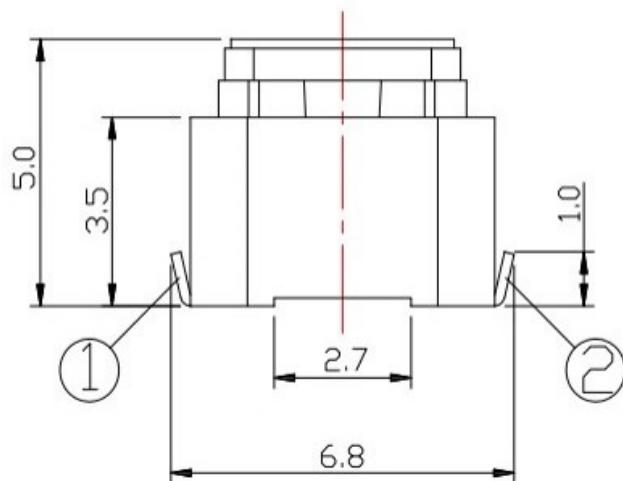

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100 mΩ Max.			
Travel	1.30±0.1 mm			
Operating Force	1	120 ± 30gf	2	180 ± 50gf
	3	250 ± 50gf	4	320 ± 50gf
Operating Life (cycles)	100,000			80,000



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/26/18
DATE: 09/26/18
DATE: 09/26/18

MAT'L
FINISH
SCALE: 1:1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: TACT SWITCH
DWG NO.: TS-A32USA-x-S138
PART NO.: TS-A32USA-x-S138

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增Operating Force:320 ± 50gf	Jack	09/26/18