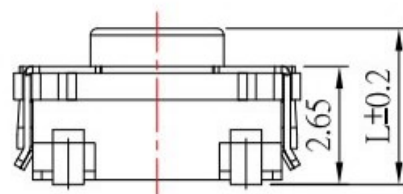
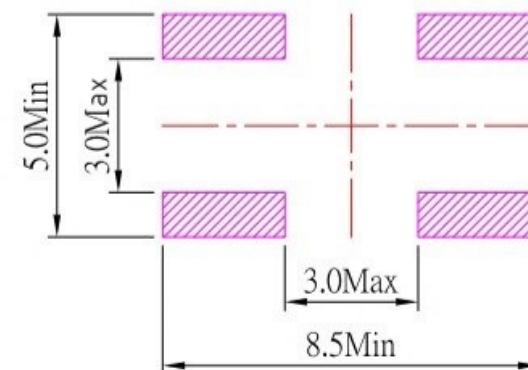

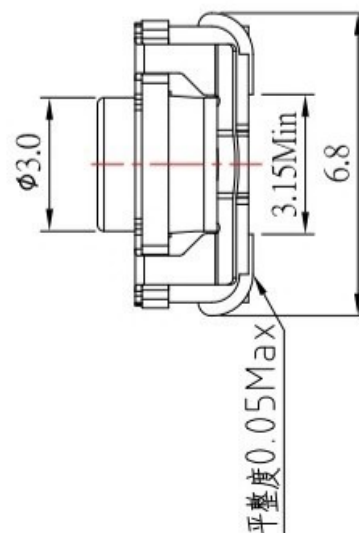
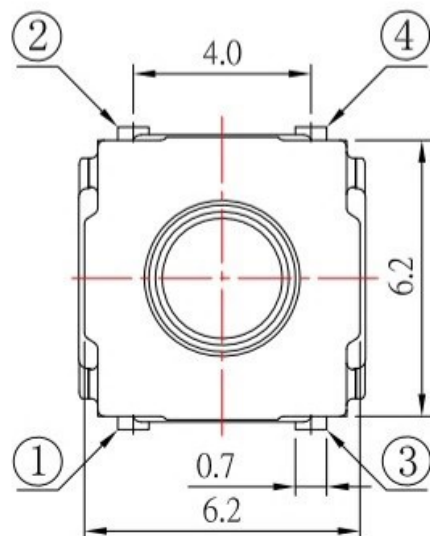


IP67

RoHS
Compliant

TS-A53WUx-xS-S138

X	L (mm)
Blank	3.5
A	5.2

Operoling Force

SPECIFICATIONS

Rating	DC 12V, 50mA.
Insulation Resistance	100 MΩ Min.
Contact Resistance	100 mΩ Max.
Travel	0.50 ± 0.30mm
Operating Force	2180 ± 50gf / 7400 ± 100gf
Operating Life (cycles)	100,000

E	TERMINAL	4	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA6T	
A	STEM	1	SILICONE(WHITE)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATEDUp to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.33RD.
ANGEL'S

UNITS

MM

DRAWN BY: DATE

Jack Lu 06/23/21

CHECKED BY: DATE

Jacky Chen 06/23/21

APPROVED BY: DATE

Tony Kao 06/23/21

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH SMT 防水型 IP67

TS-A53WUx-xS-S138

TS-A53WUx-xS-S138

SIZE

A4

VER

R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增按钮高度选项	Jack	06/23/21
1	新增Operating Force选项	Jack	10/07/20