

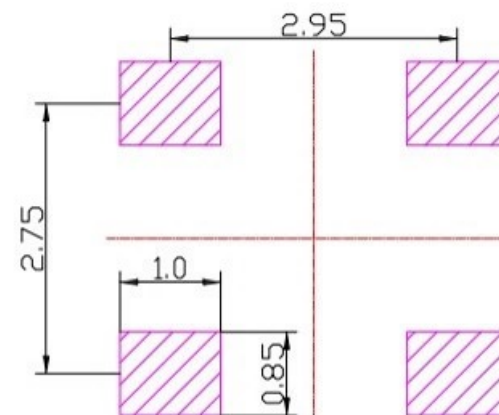


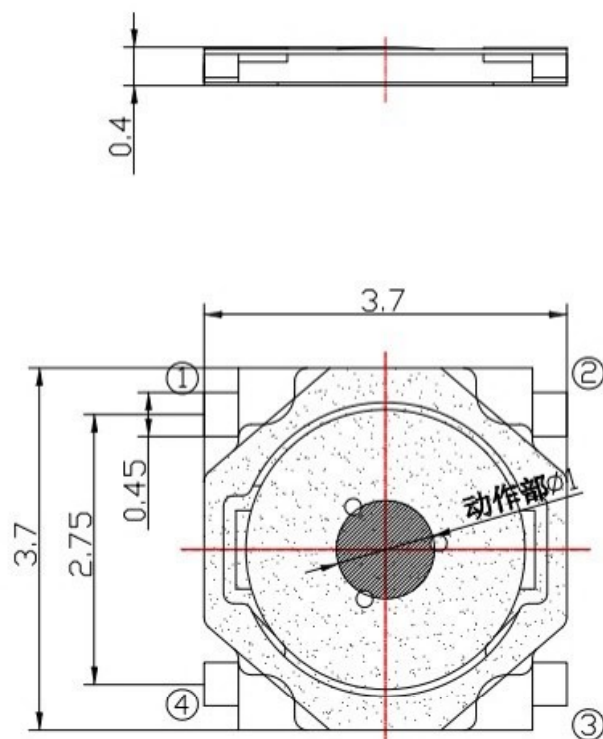

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100mΩ Max.
Operating Force	2 160 ± 50gf 3 260 ± 50gf
Operating Life(cycles)	70,000



CIRCUIT DIAGRAM

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
D	FILM	1		
C	CONTACT	1	SUS	Ag plated
B	BASE	1	LCP(Black)	
A	THERMINAL	4	PHOSPHOR BRONZE	



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

05/07/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A96-x-S410

TS-A96-x-S410

SIZE

A4

VER

R