




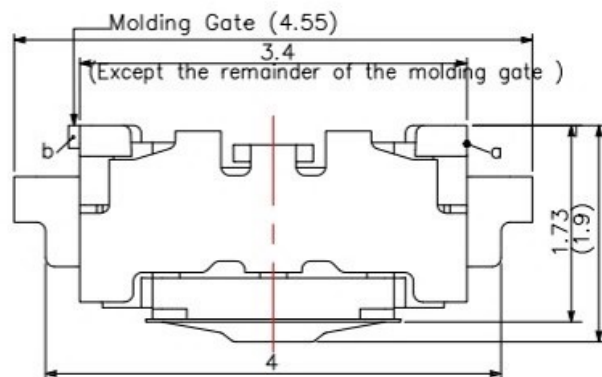




CIRCUIT DIAGRAM

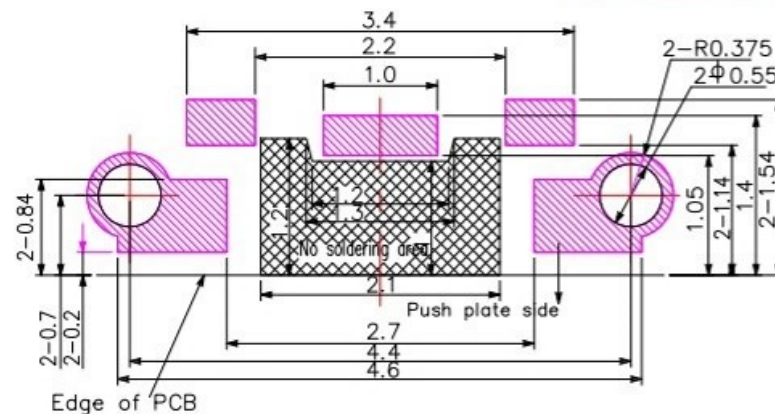

PCB LAYOUT

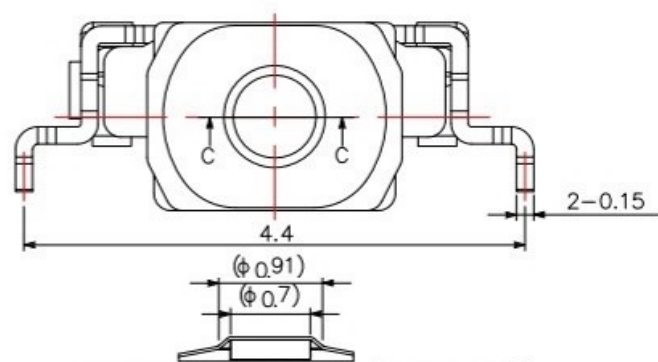

Actuator cross section (Section C-C)

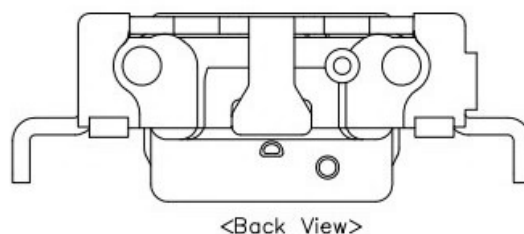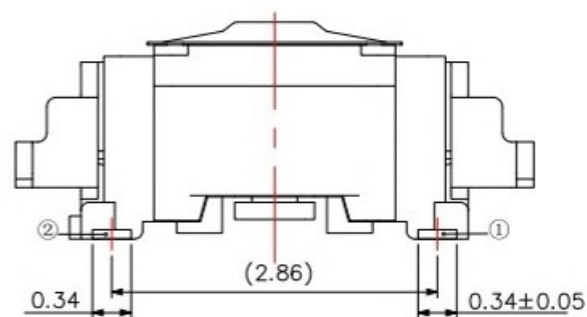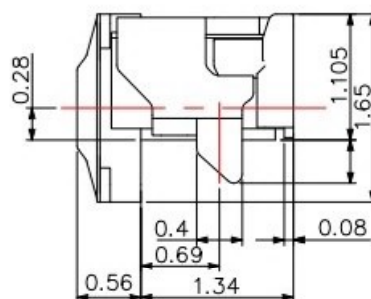

<Back View>

SPECIFICATIONS

Rating	DC 15V 20mA.			
Insulation Resistance	50 MΩ Min.			
Contact Resistance	500 mΩ Max.			
Dielectric Withstanding Voltage	AC 250V for 1 min			
Operating Force	0	100 ± 30gf	2	160 ± 50gf
			3	240 ± 50gf
Operating Life (cycles)	500,000			



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/04/20

CHECKED BY:

Jacky Chen

DATE

12/04/20

APPROVED BY:

Tony Kao

DATE

12/04/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A99-κ-S182

TS-A99-κ-S182

SIZE

A4

VER

R