

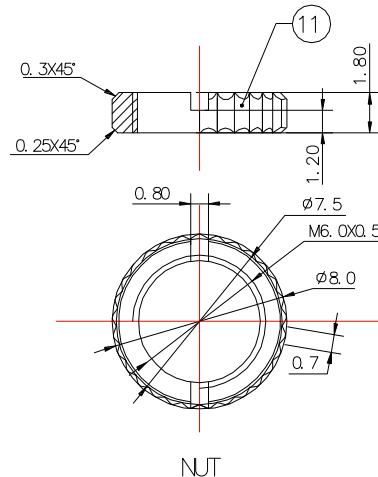
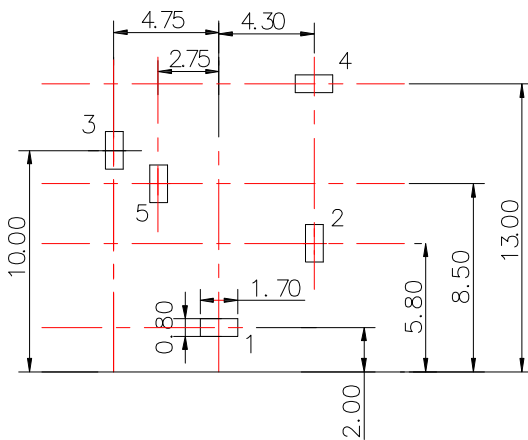
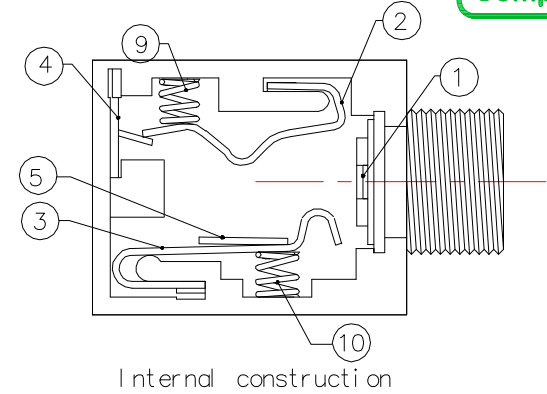
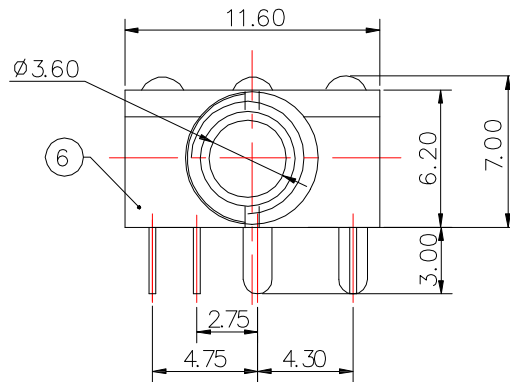


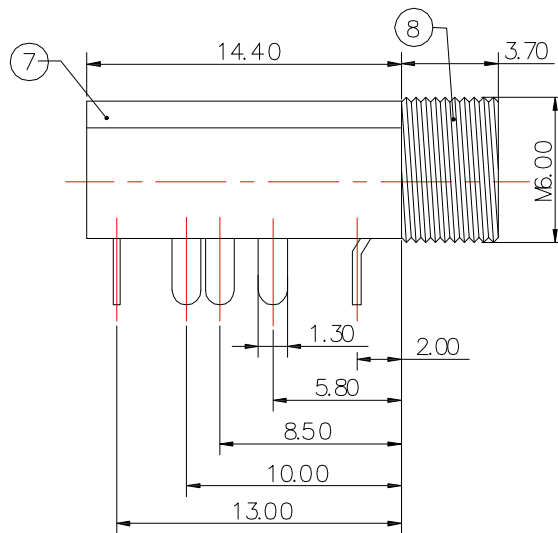

PJ-3525N



SPECIFICATION

- Rating : DC 30V 1.0A
- Contact resistance : $\leq 100\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-25N
- life test : 5,000 cycles

⑪	NUT	1	H59	Ni-Plating
⑩	SPRING-5	1	72A	Ni-Plating
⑨	SPRING-3	1	72A	Ni-Plating
⑧	SOCKET	1	H59	Ni-Plating
⑦	COVER	1	PC	Transparent
⑥	HOUSING	1	PA66	Black
⑤	TERMINAL-5	1	BRASS	Ag-Plating
④	TERMINAL-4	1	BRASS	Ag-Plating
③	TERMINAL-3	1	BRASS	Ag-Plating
②	TERMINAL-2	1	BRASS	Ag-Plating
①	TERMINAL-1	1	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

PCB LAYOUT



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/03/15			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/03/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-3525N-S258
Tony Kao	11/03/15	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-3525N-S258
				SIZE A4
				VER R2