
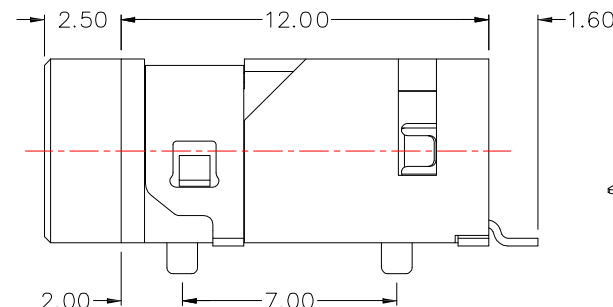
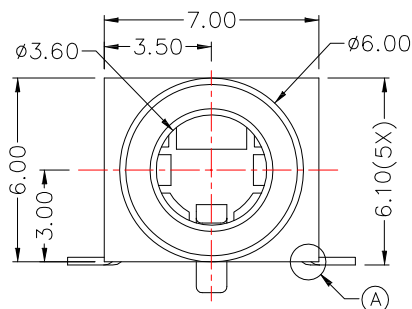
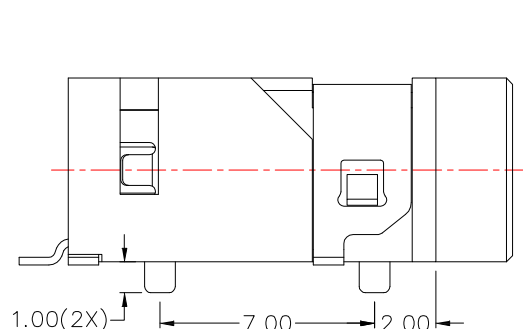
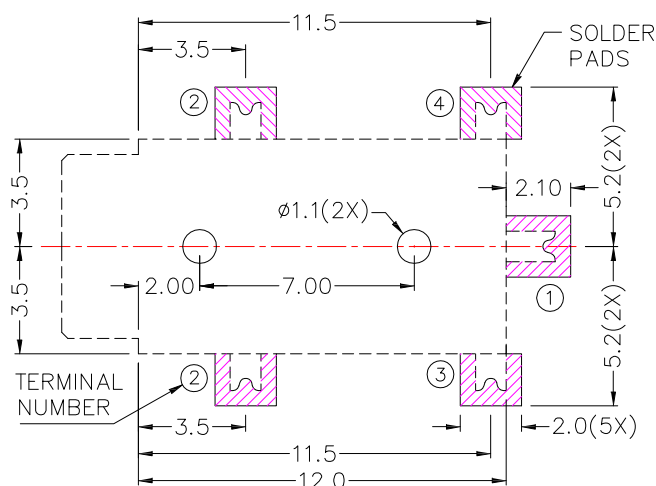



MODEL NO.	PJ-5114D
SCHMATIC	

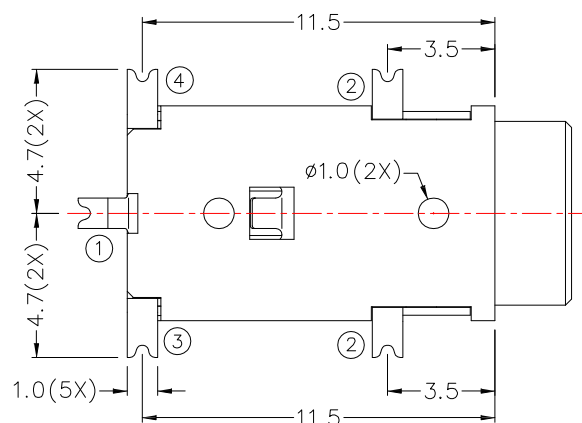

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
HOUSING : PA6T



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/29/16
DATE: 06/29/16
DATE: 06/29/16

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

JACK
PHONE JACK
PJ-5114D

PART NO.
PJ-5114D

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SPEC	Jack	062916