
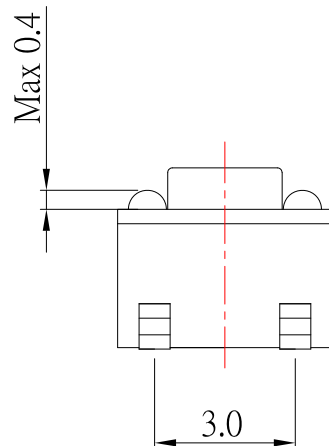
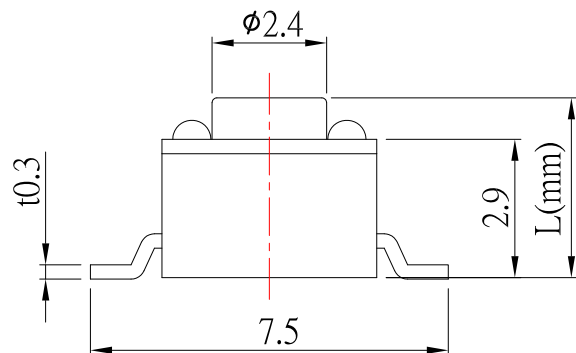
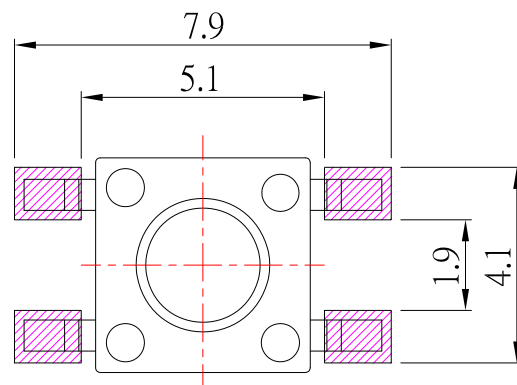
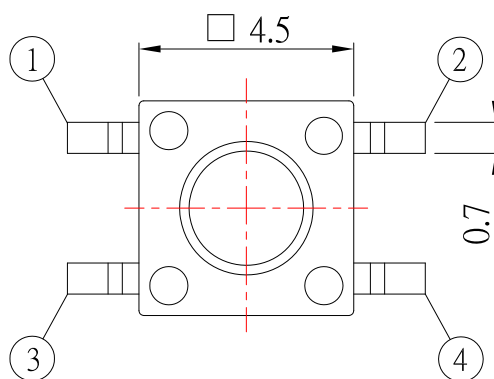


CIRCUIT DIAGRAM



P.C.B LAYOUT
MOUNTING PATTERN

MODEL NO	Knob (L)
TS-A09S	3.8
TS-A09SA	7.0
TS-A09SB	4.8

SPECIFICATIONS

Rating	DC 12V 50mA Max.									
Contact Resistance	100mΩ Max.									
Travel	0.25 ± 0.1mm									
Operating Force	0	100 ± 30gf	1	130 ± 30gf	2	160 ± 50gf	3	250 ± 50gf	4	320 ± 50gf
Operating Life (cycles)	100,000									80,000



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE

08/10/15

CHECKED BY:
Jacky Chen

DATE

08/10/15

APPROVED BY:
Tony Kao

DATE

08/10/15

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A09S-x-S126

TS-A09S-x-S126

SIZE

A4

VER

A2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增Operating Force:320± 50gf	Jack	081015
1	新增Operating Force:100± 30gf	Jack	031714