
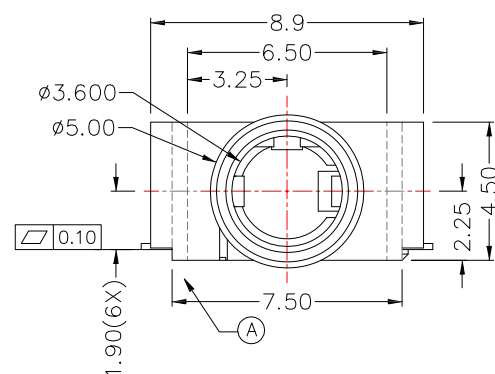
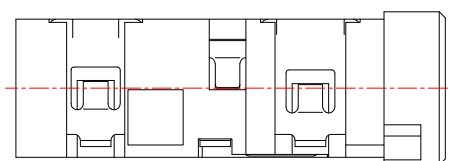

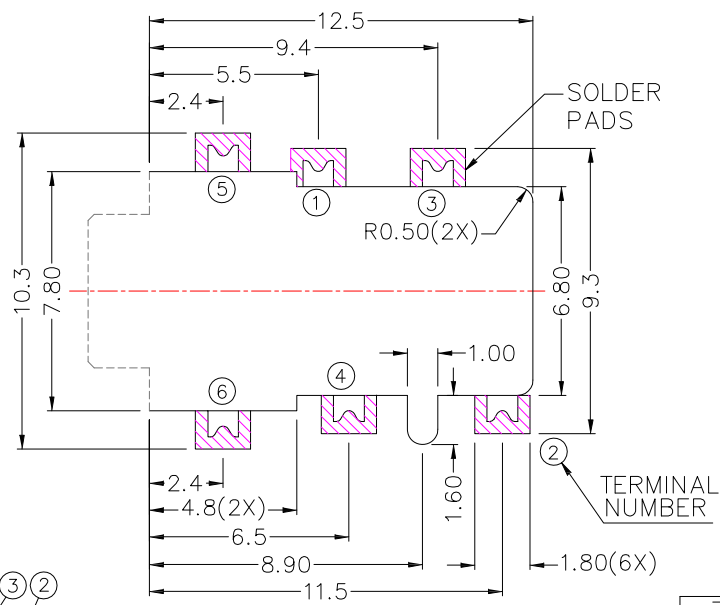
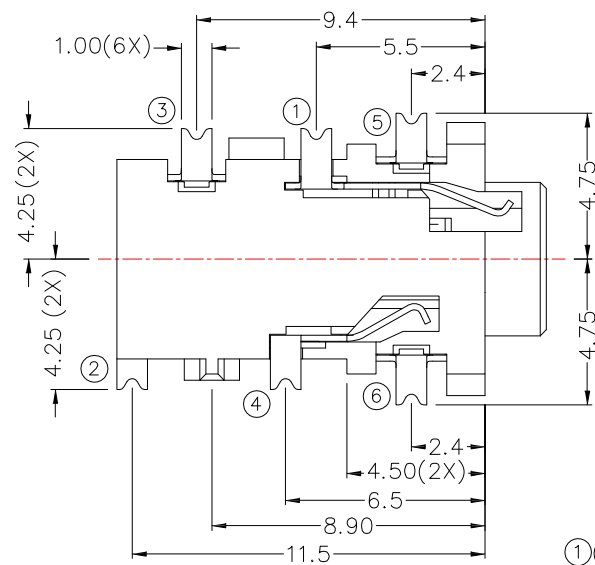



SCHEMATIC



RECOMMENDED
SOLDER PAD LAYOUT

SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

7	HOUSING	1	PA6T	
6	TERMINAL 6	1	PHOSPHOR BRONZE	Au-Plating
5	TERMINAL 5	1	PHOSPHOR BRONZE	Au-Plating
4	TERMINAL 4	1	PHOSPHOR BRONZE	Au-Plating
3	TERMINAL 3	1	PHOSPHOR BRONZE	Au-Plating
2	TERMINAL 2	1	PHOSPHOR BRONZE	Au-Plating
1	TERMINAL 1	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	MAT'L		TITLE	JACK
	FINISH		MODLE	PHONE JACK
	SCALE	1 : 1	DWG NO.	PJ-5076D
	SHEET NO.	1 of 1	PART NO.	PJ-5076D
				SIZE A4
				VER R2

 **东莞市高迪电子有限公司**
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

2	新增SPEC	Jack	110315
1	更新料號	Jack	071013
ITEM NO.	DESCRIPTION	DRAWN	DATE

DRAWN BY:	DATE
Jack Lu	11/03/15
CHECKED BY:	DATE
Jacky Chen	11/03/15
APPROVED BY:	DATE
Tony Kao	11/03/15

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS

MM