


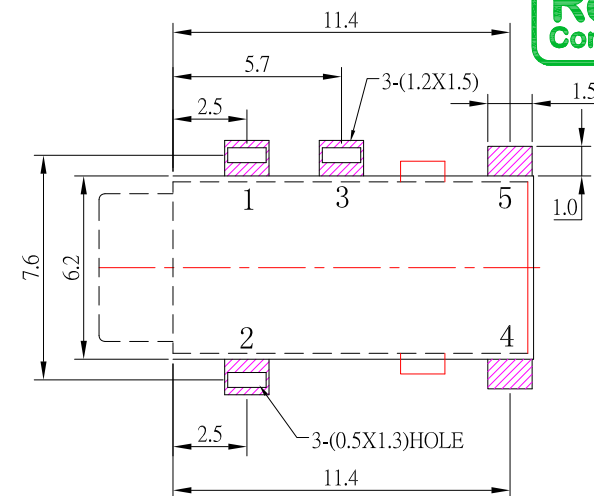
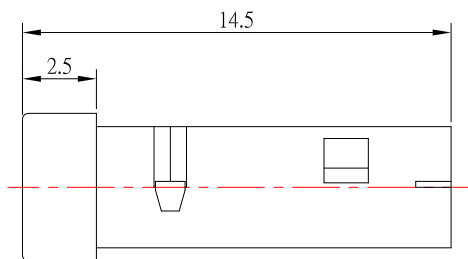


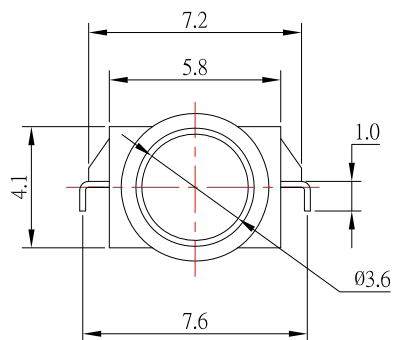


P.C.B LAYOUT
TOP VIEW

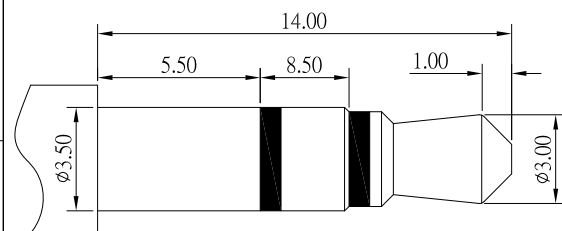

3.5mm 3 POLE PLUG

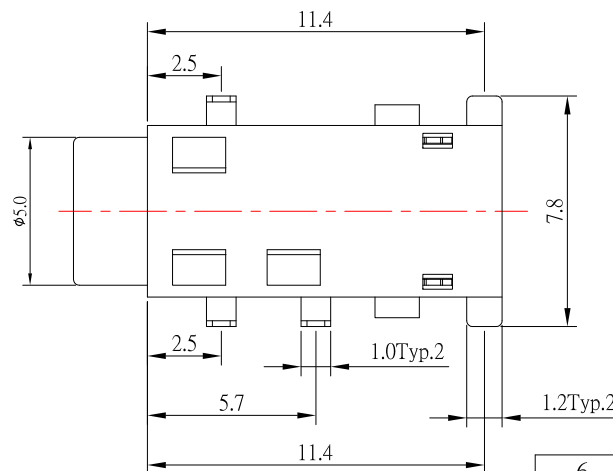

SCHEMATIC



SPECIFICATION

- 1.Rating: DC 30V 0.5A ;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$;
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-20N;
- 6.life test: 5,000 cycles °

6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/12/17			
CHECKED BY:	DATE	FINISH	MODLE	3.5mm PHONE JACK 端子脚鍍金
Jacky Chen	04/12/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-5055D-S124
Tony Kao	04/12/17	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-5055D-S124



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			