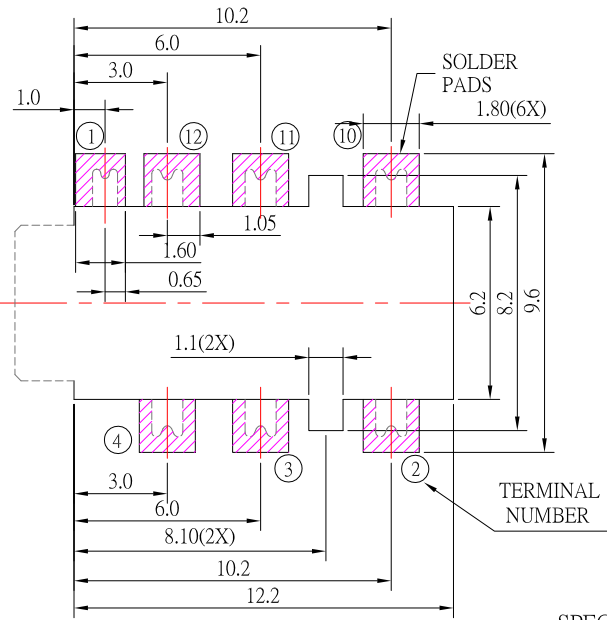
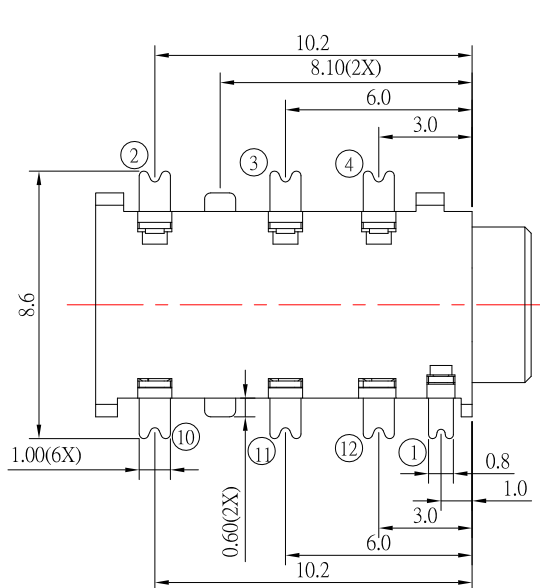
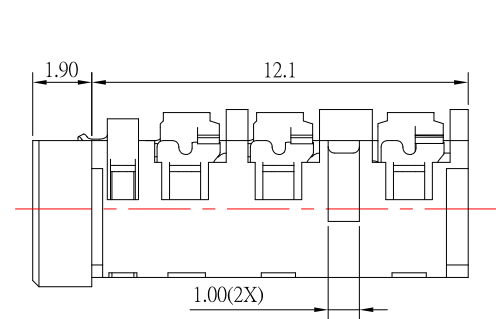
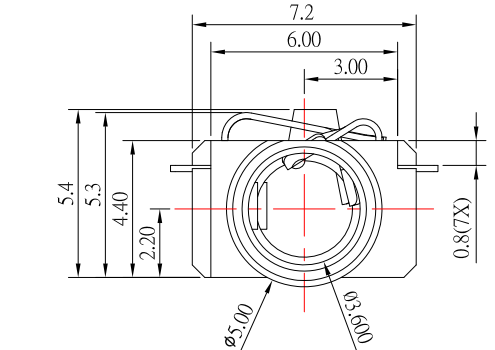
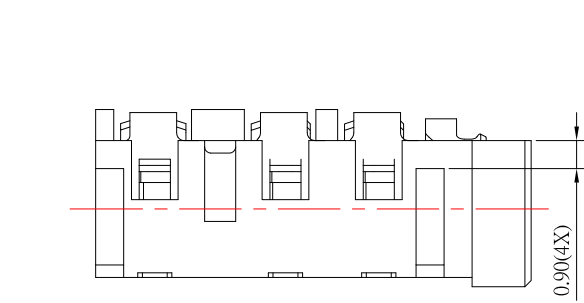


RECOMMENDED
SOLDER PAD LAYOUT

SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

*MATERIAL

TERMINAL 1	:PHOSPHOR BRONZE
TERMINAL 2	:PHOSPHOR BRONZE
TERMINAL 3	:PHOSPHOR BRONZE
TERMINAL 4	:PHOSPHOR BRONZE
TERMINAL 10	:PHOSPHOR BRONZE
TERMINAL 11	:PHOSPHOR BRONZE
TERMINAL 12	:PHOSPHOR BRONZE
HOUSING	:PA6T

MODEL NO.	PJ-3927D	PJ-3926AD	PJ-3925AD	PJ-3925BD	PJ-3924D
SCHEMATIC					



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/03/15			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/03/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-392xD
Tony Kao	11/03/15	4 : 1		
		SHEET NO.	PART NO.	PJ-392xD
		1 of 1		
				SIZE A4
				VER A1