

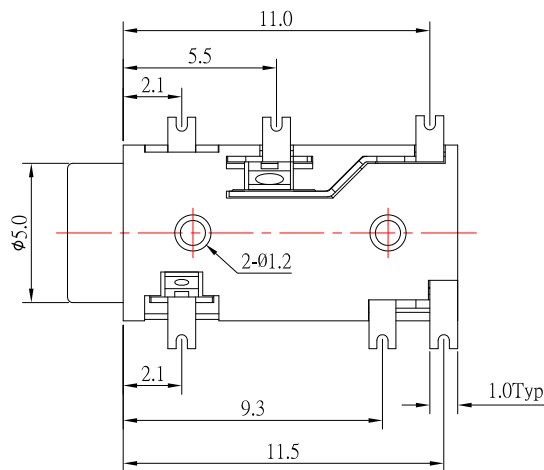


ø3.50mm 4 POLE PLUG

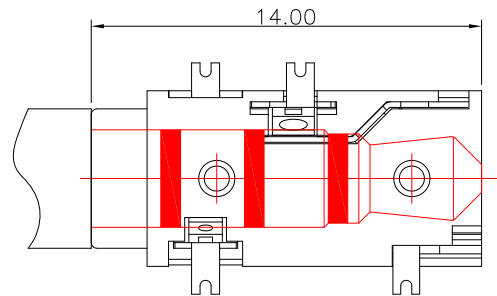


SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles °

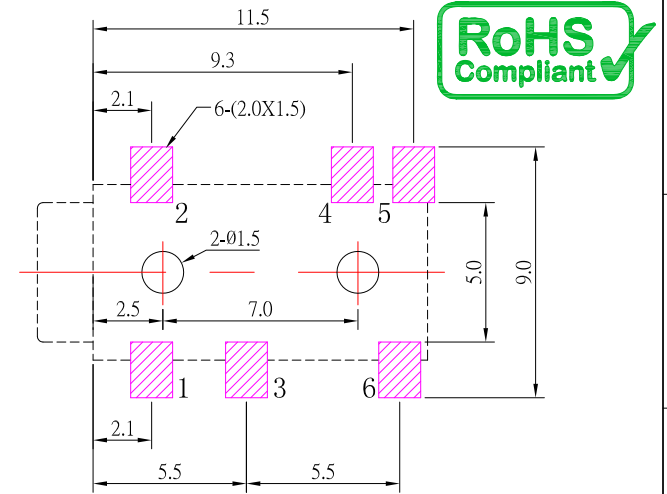

P.C.B LAYOUT
TOP VIEW
SCHEMATIC

PJ-3896D	PJ-3893AD	PJ-3893D	PJ-3894D	PJ-3895AD	PJ-3895BD

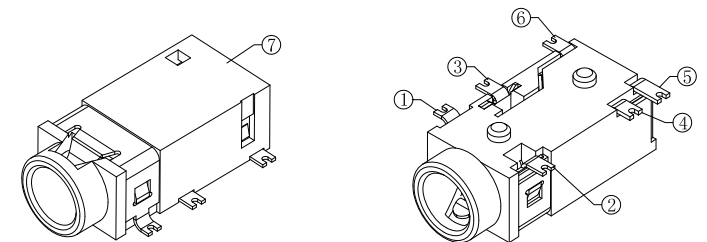

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRASS	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/08/17
DATE: 06/08/17
DATE: 06/08/17

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: JACK
MODLE: PHONE JACK
DWG NO. PJ-389xD-S124
PART NO. PJ-389xD-S124

SIZE: A4
VER: A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增插入示意图	Jack	060817
1	更新为A0版	Jack	031317