


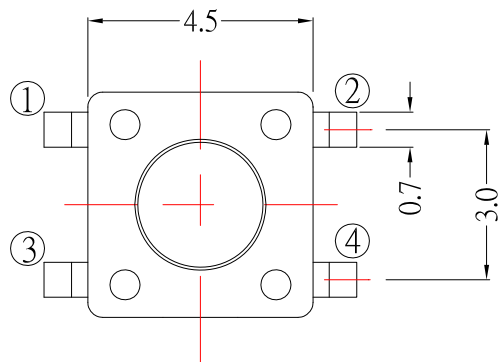






CIRCUIT DIAGRAM



P.C.B LAYOUT
MOUNTING PATTERN

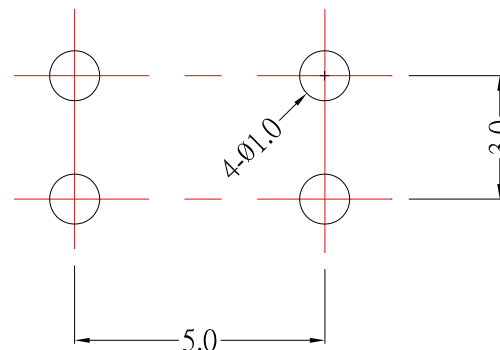

Model No.	L (mm)
TS-A09	3.8
TS-A09A	7.0

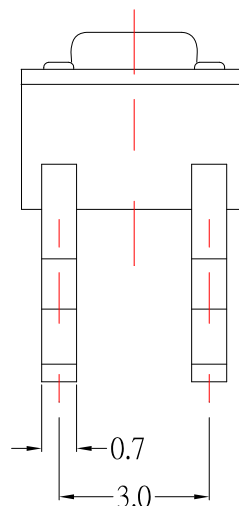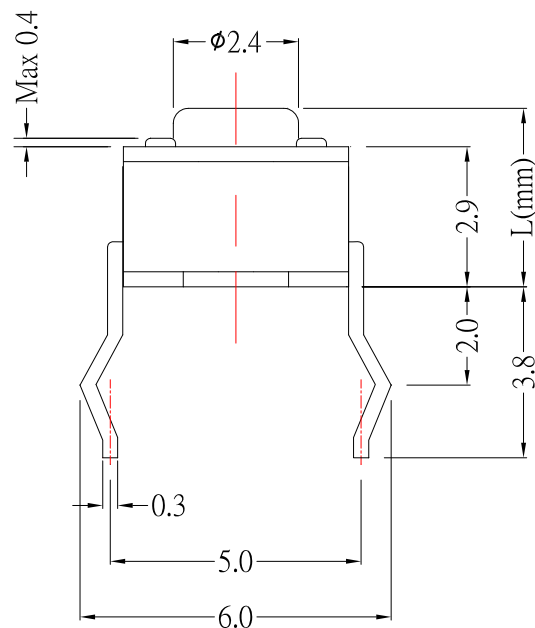

SPECIFICATIONS

Rating	DC 12V 50mA Max.				
Circuit	1C - 1P				
Contact Resistance	100mΩ Max.				
Travel	0.25 ± 0.1mm				
Operating Force	0	100 ± 30gf	1	130 ± 30gf	2 180 ± 50gf 3 250 ± 50gf
Operating Life (cycles)	100,000				

5	TERMINAL	1	BRASS	Ag plated
4	CASE	1	PA6T	
3	CONTACT	1	STAINLESS	Ag plated
2	STEM	1	PA6T	
1	COVER	1	SPCC	Tin plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
03/25/15
DATE
03/25/15
DATE
03/25/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A09-x-S126
TS-A09-x-S126

SIZE
A4
VER
A2