

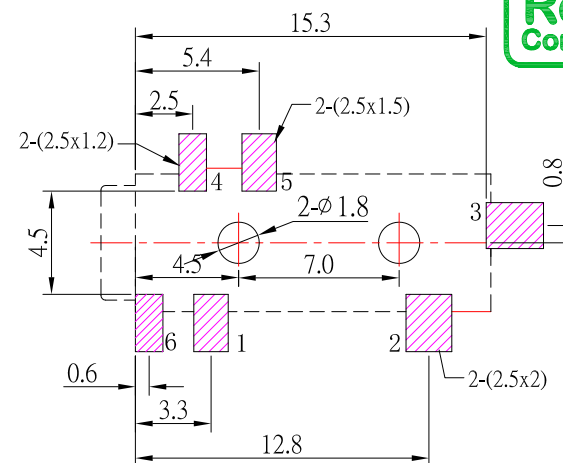
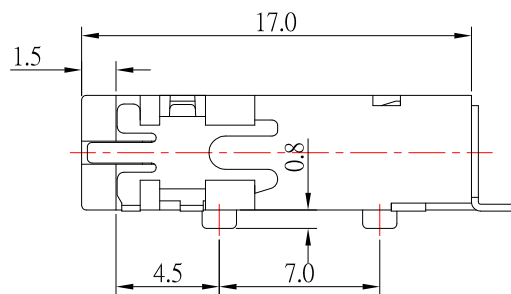




P.C.B LAYOUT
(TOP VIEW)


SCHEMATIC

PJ-3756	PJ-3755	PJ-3755A	PJ-3754	PJ-3755B	PJ-3753

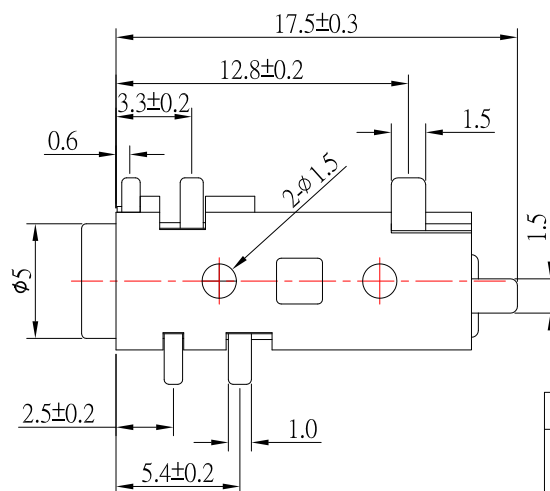

SPECIFICATION

- 1.Rating : DC 30V 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles .

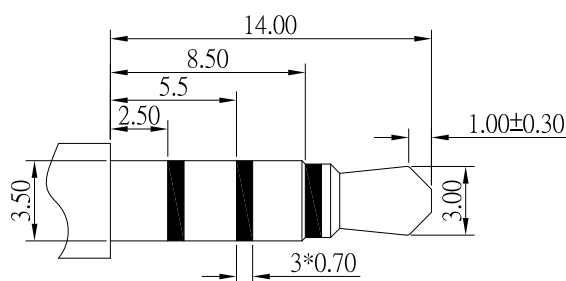

3.50mm 4 POLE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	5# CONTACT FOOT	1	Be-Cu	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	BRASS	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	Be-Cu	Ag-Plating



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
05/07/19
DATE
05/07/19
DATE
05/07/19

MATL
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

JACK
PHONE JACK
PJ-375x-S124

PART NO.
PJ-375x-S124

SIZE
A4
VER
R2

ITEM NO	DESCRIPTION	DRAWN	DATE
2	更新尺寸	Jack	050719
1	更新為A0版	Jack	030217