


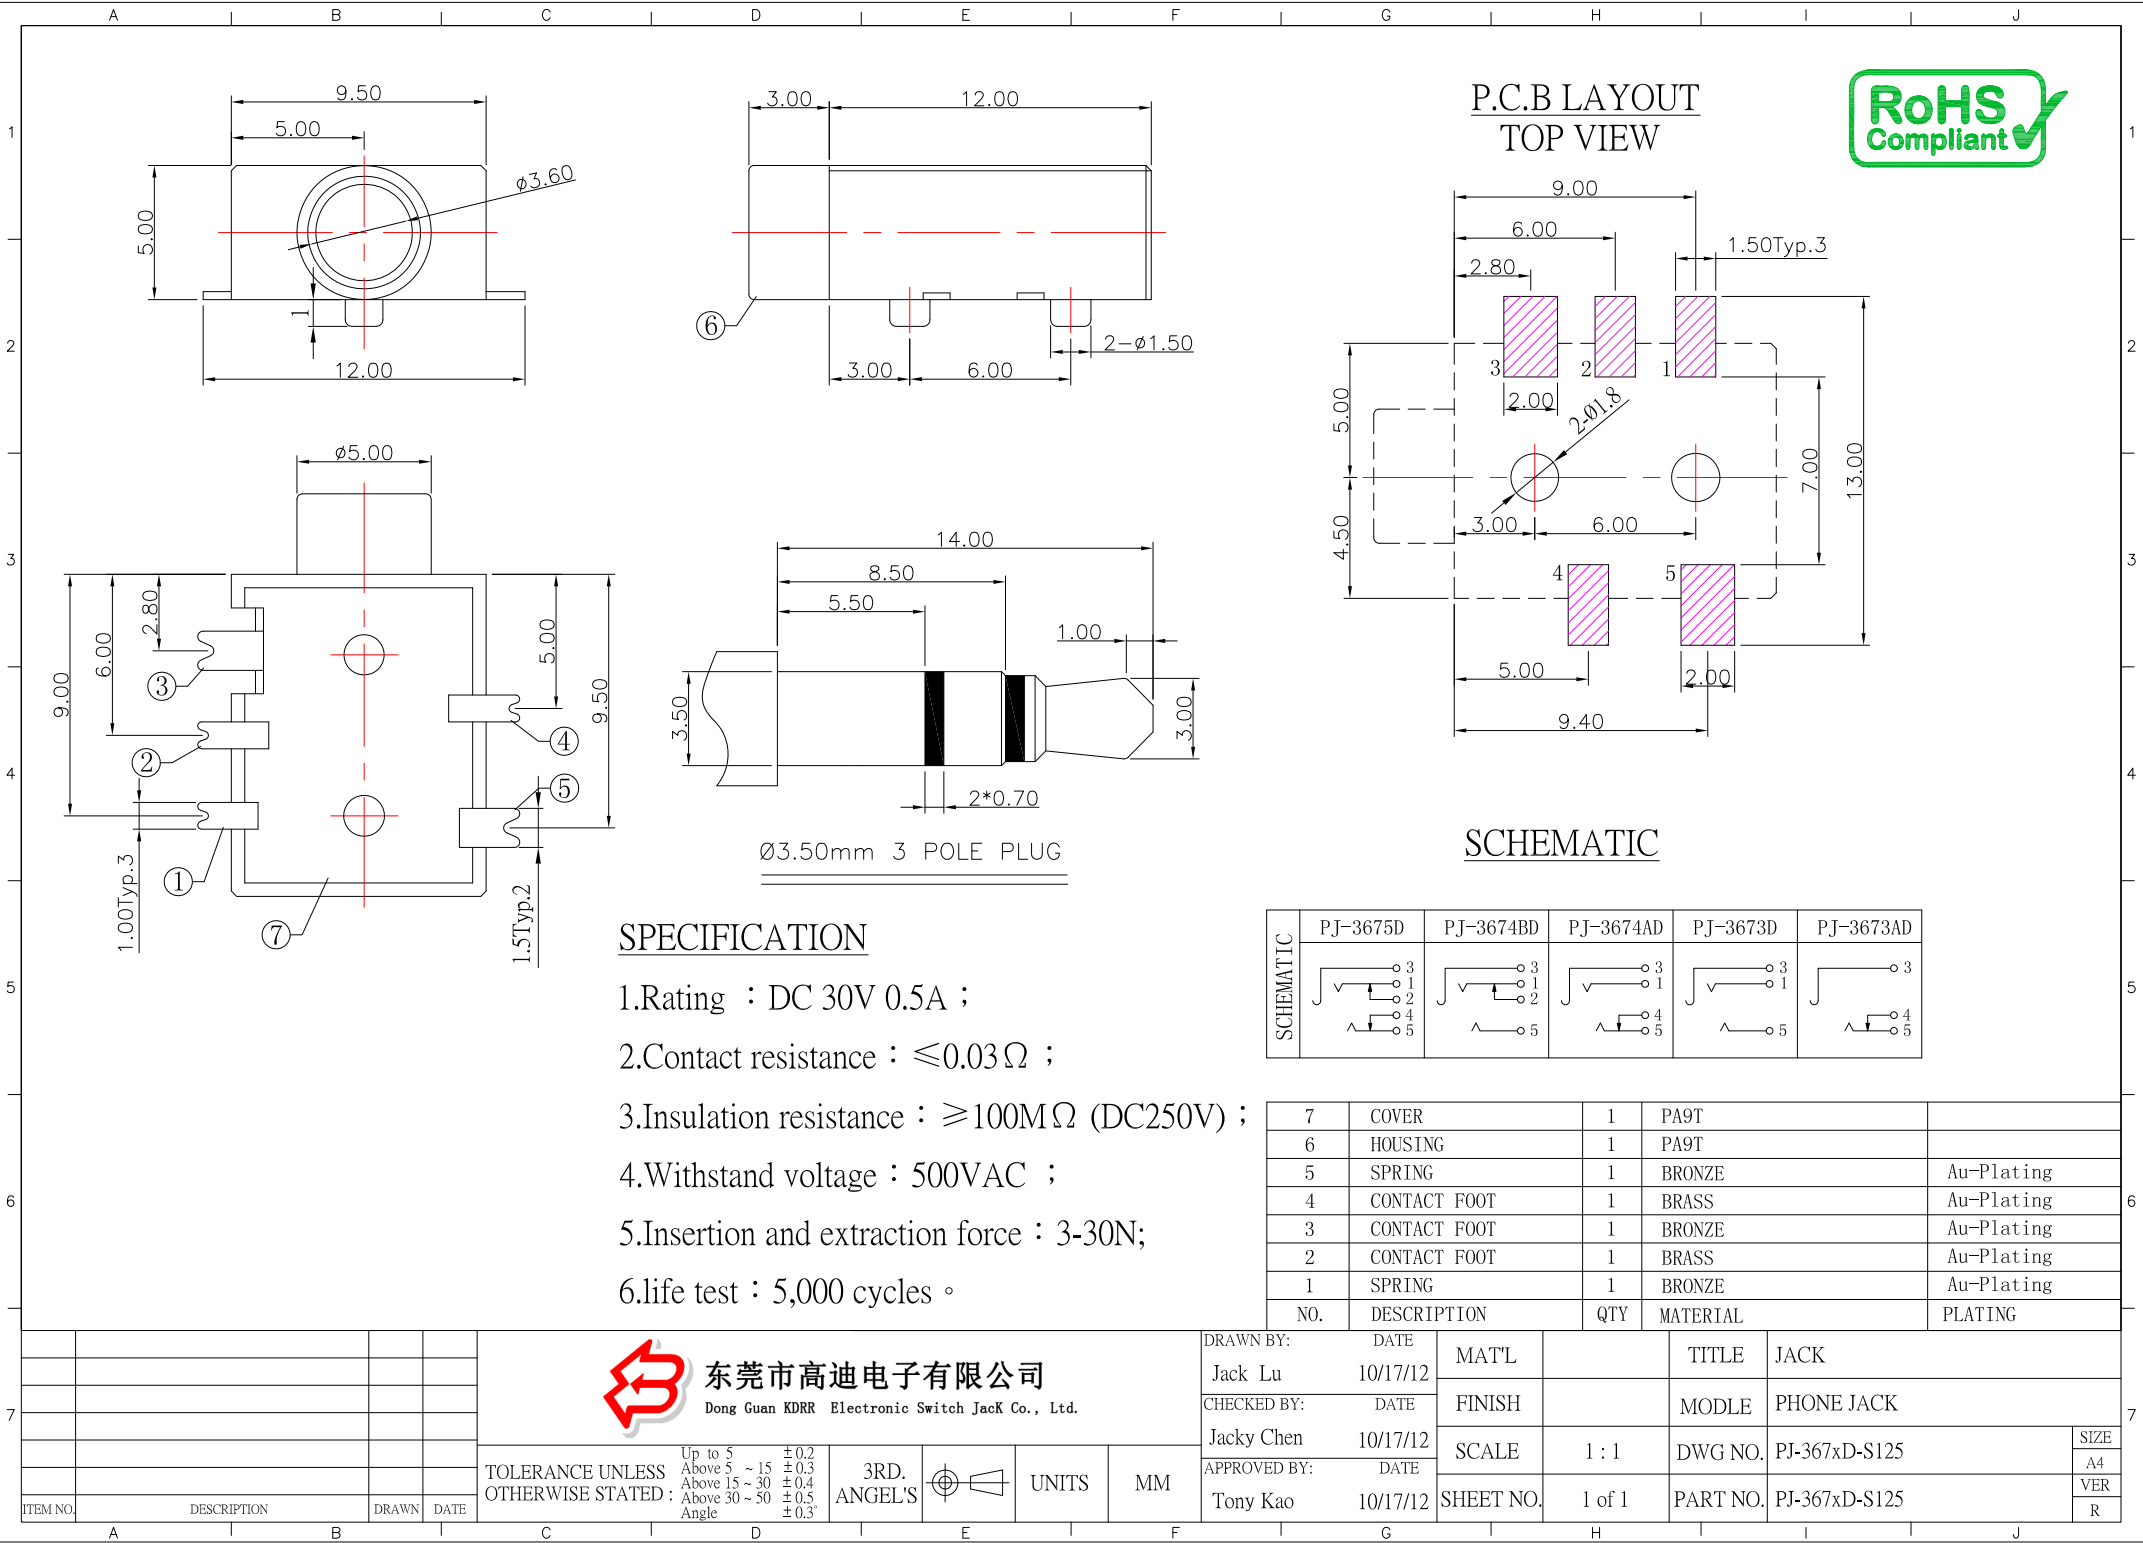

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

	PJ-3675D	PJ-3674BD	PJ-3674AD	PJ-3673D	PJ-3673A
SCHEMATIC					

7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	SPRING	1	BRONZE	Au-Plating
4	CONTACT FOOT	1	BRASS	Au-Plating
3	CONTACT FOOT	1	BRONZE	Au-Plating
2	CONTACT FOOT	1	BRASS	Au-Plating
1	SPRING	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch Jack Co., Ltd.							DRAWN BY:		DATE		MAT'L		TITLE	JACK				
											Jack Lu		10/17/12			FINISH		MODLE	PHONE JACK			
											CHECKED BY:		DATE		Jacky Chen		10/17/12	SCALE	1 : 1	DWG NO.	PJ-367xD-S125	SIZE
											APPROVED BY:		DATE									Tony Kao
				TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM					VER							
ITEM NO.	DESCRIPTION			DRAWN	DATE											R						
A B C D E F G H I J																						