


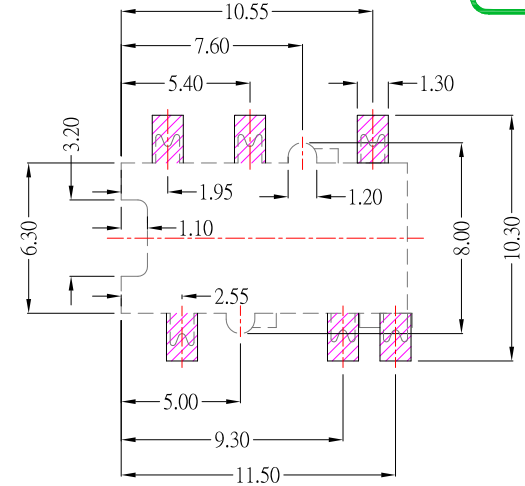
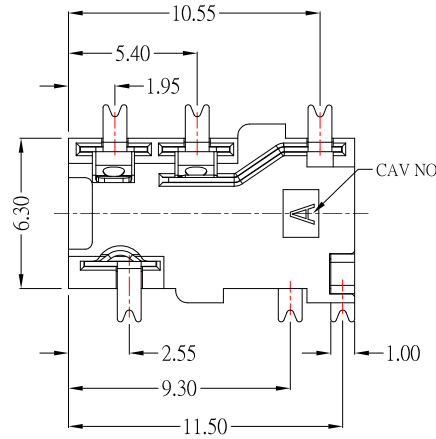
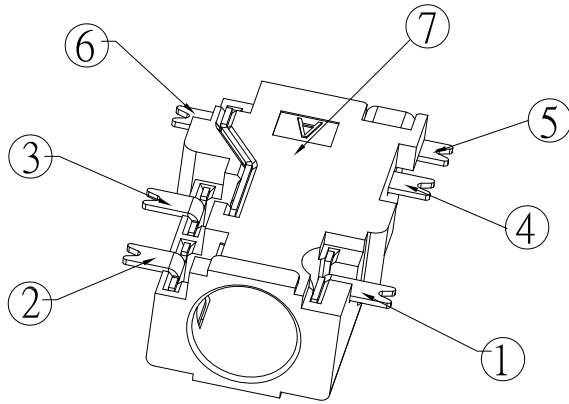


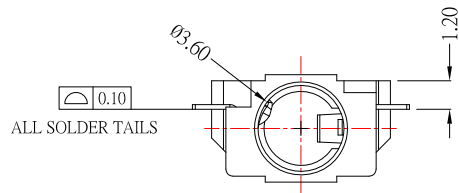



P.C.B LAYOUT
TOP VIEW

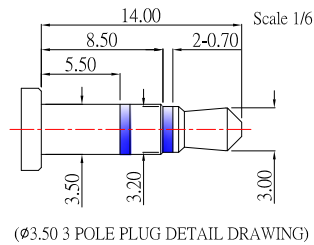

SCHEMATIC

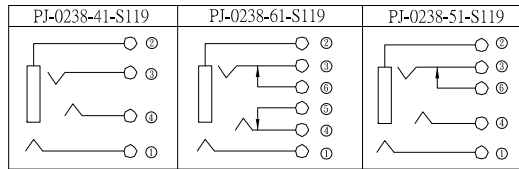

(ø3.50 3 POLE PLUG DETAIL DRAWING)

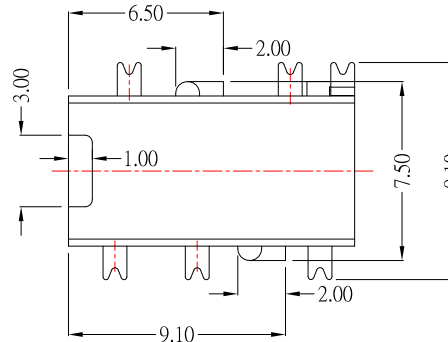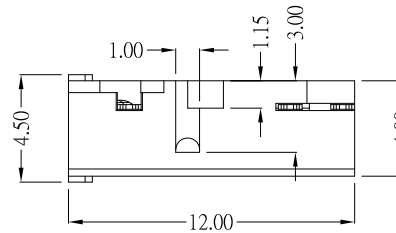

SPECIFICATIONS:

1. CONTACT CURRENT RATING: 0.5A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
6. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.

⑦	HOUSING	1	HIGHT TEMPERATURE PLASTIC	
⑥	CONTACT F1	1	BRASS	
⑤	CONTACT E1	1	BRASS	
④	CONTACT D1	1	BeCu	
③	CONTACT C1	1	BeCu	
②	CONTACT C1	1	BeCu	
①	CONTACT B	1	PHOSPHOR BRONZE	
ITEM	PART NAME	Q'TY	MATERTAL	REMARK

MAT'L		TITLE	JACK	
FINISH		MODLE	PHONE JACK	
SCALE	1 : 1	DWG NO.	PJ-0238-xx-S119	SIZE A4
SHEET NO.	1 of 1	PART NO.	PJ-0238-xx-S119	VER A1



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 12/23/14
DATE: 12/23/14
DATE: 12/23/14