


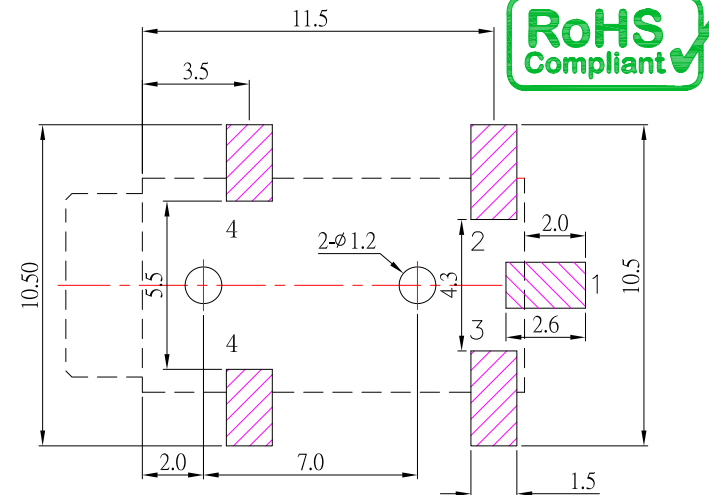
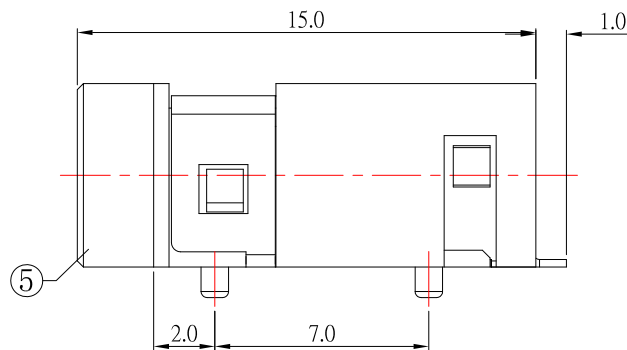


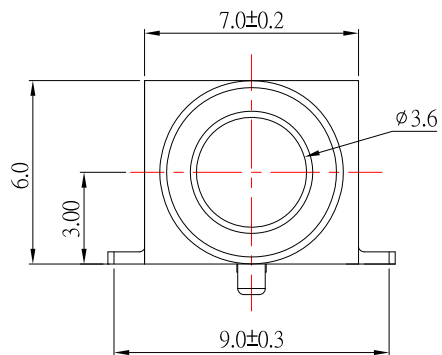


P.C.B LAYOUT
TOP VIEW

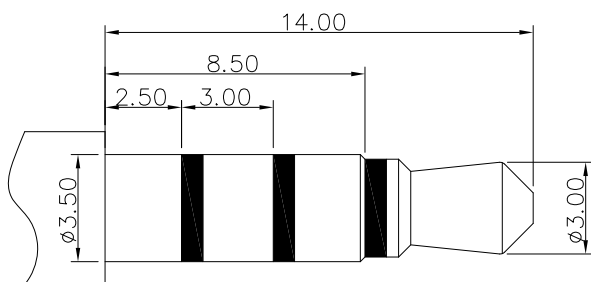

Ø3.50mm 4 POLE PLUG

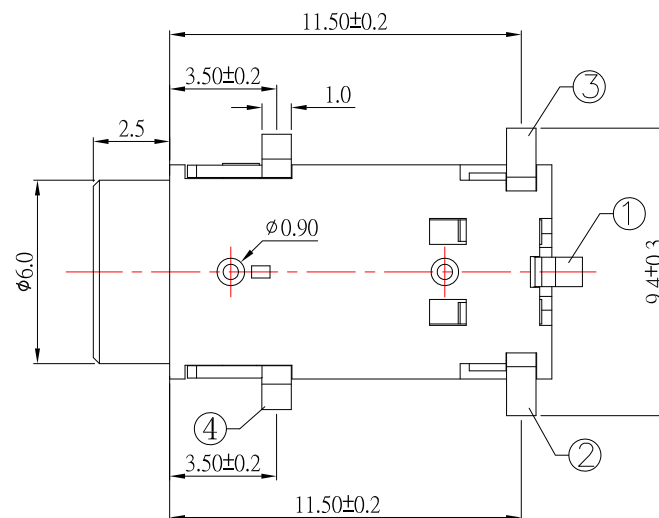


SCHEMATIC



SPECIFICATIONS

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles



5	HOUSING	1	PA9T	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
03/29/19

CHECKED BY:
Jacky Chen

DATE
03/29/19

APPROVED BY:
Tony Kao

DATE
03/29/19

MAT'L

FINISH

SCALE

TITLE
JACK

MODLE
PHONE JACK

DWG NO. PJ-S3022-S124

PART NO. PJ-S3022-S124

SIZE
A4
VER
R1

1	更新樣式及尺寸	Jack	032919
ITEM NO.	DESCRIPTION	DRAWN	DATE