



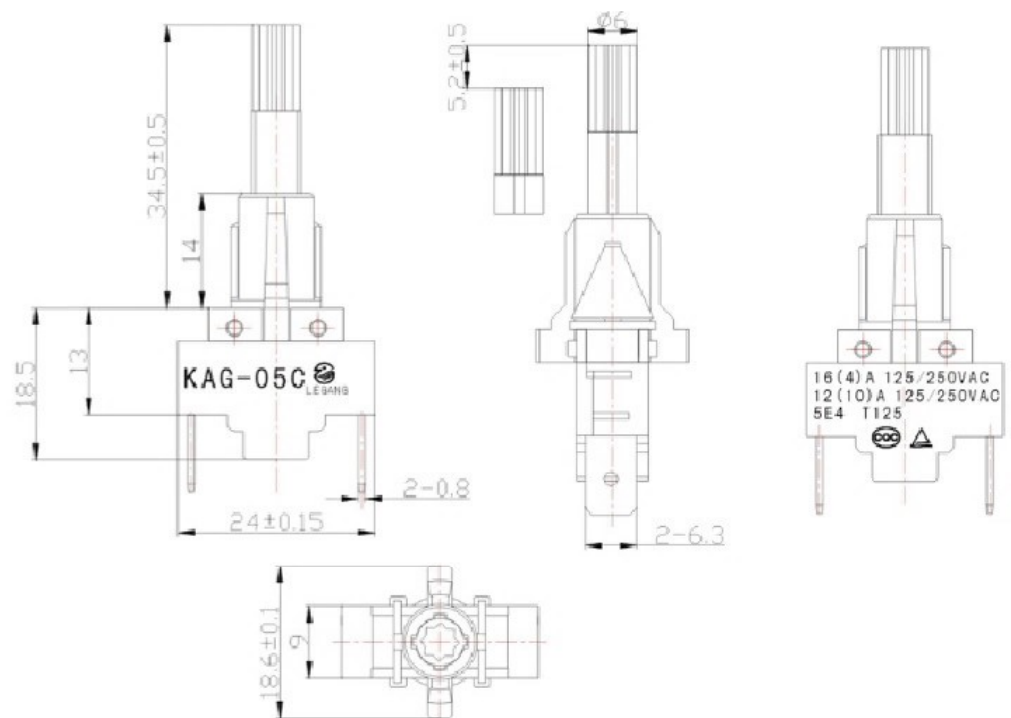

配线图



电源参数: 16(4)A 125V/250V AC 12(10)A 125V/250V AC
接触电阻: $\leq 50\text{m}\Omega$
绝缘电阻: $\geq 100\text{M}\Omega$
介电强度: 极与极1500VAC, 极与壳3000VAC
环境温度: T125
电气寿命: 5E4

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-8-13	初版	
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CAM STICK	SUS	1	NATURAL	TITLE : VERTICAL PUSH SWITCH			UNIT : mm	DRWG NO.:
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:			SCALE: 5:1	
2	COVER	PA66	1	BLACK	东莞市高迪电子有限公司			DWN.	2012-8-13
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD				CHK'D	
NO.	PARTS	MATERIALS	Q'TY					APPD.	2012-8-13