

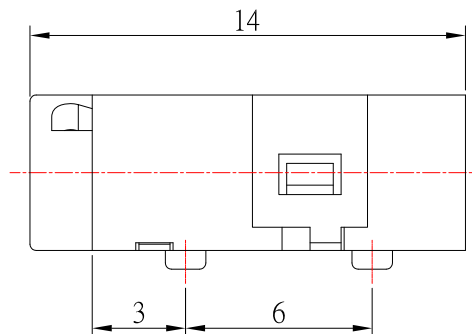


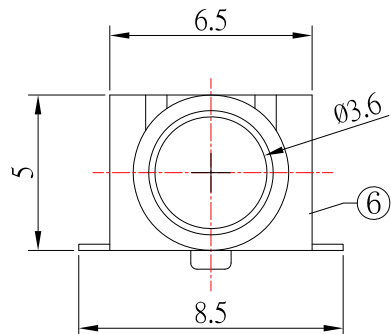


P.C.B LAYOUT
TOP VIEW


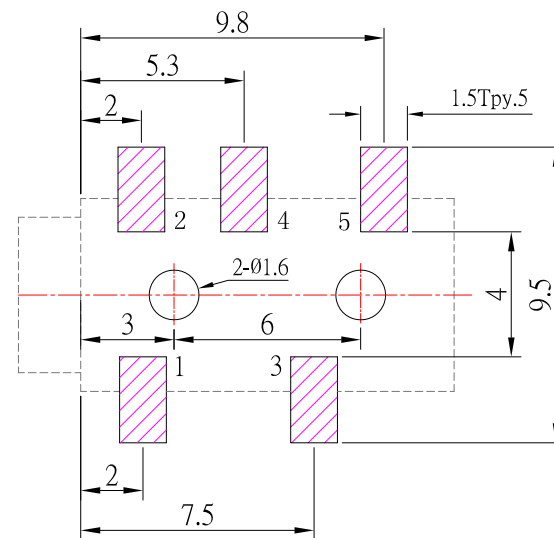


SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

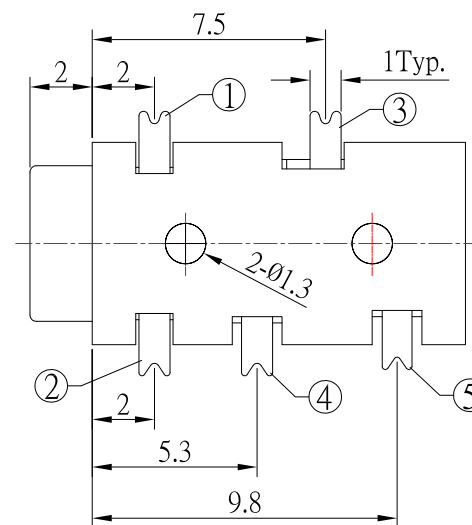

SCHEMATIC

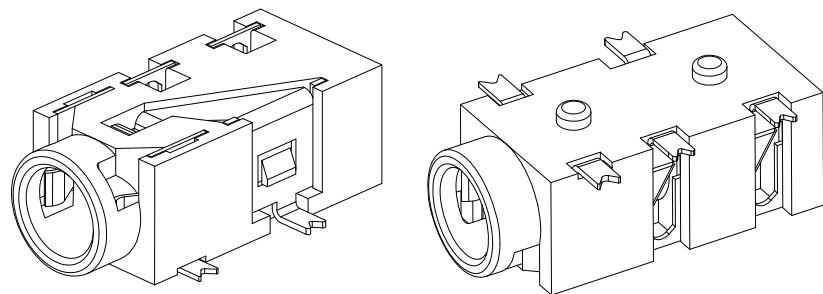

6	HOUSING	1	HTN	
5	5# CONTACT FOOT	1	STAINLESS STEEL	Ag-Plating
4	4# CONTACT FOOT	1	STAINLESS STEEL	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Frank Wu	12/07/11		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	12/07/11		DWG NO.	PJ-S3027F
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-S3027F
Tony Kao	12/07/11	1 of 1		

1	料號更新	FrankWu	082412
ITEM NO.	DESCRIPTION	DRAWN	DATE