

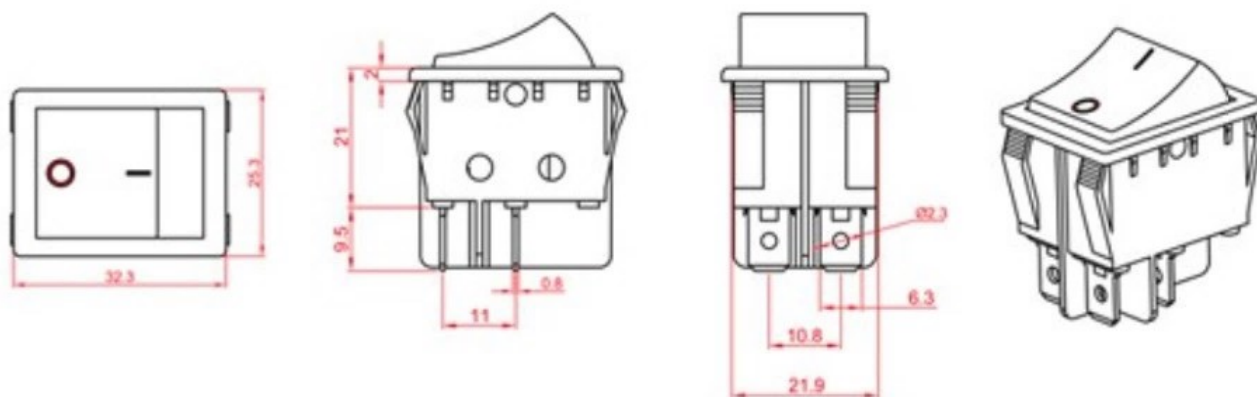





	X	Y
0.75~1.25	30.0+0.1	122.0+0.1
1.25~2.00	30.2+0.1	122.0+0.1
2.00~3.00	30.4+0.1	122.0+0.1

开孔尺寸



Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None	•	ON OFF	=	-	!	!	Mark/0.0 Back/0.0	Front Back	强制 柔和	! RUN ! STOP	! RUN ! STOP	! 充电 ! 待机	开 关	! 开 ! 关

注： "•"□表示关键尺寸(3个)。

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版	
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CAM STICK	SUS	1	NATURAL	TITLE : SWITCH				UNIT : mm
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:				DRWG NO.:
2	COVER	PA66	1	BLACK					SCALE: 5:1
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD					DWN.
NO.	PARTS	MATERIALS	Q'TY		东莞市高迪电子有限公司				2012-8-13
									CHK'D
									APPD.
									2012-8-13