


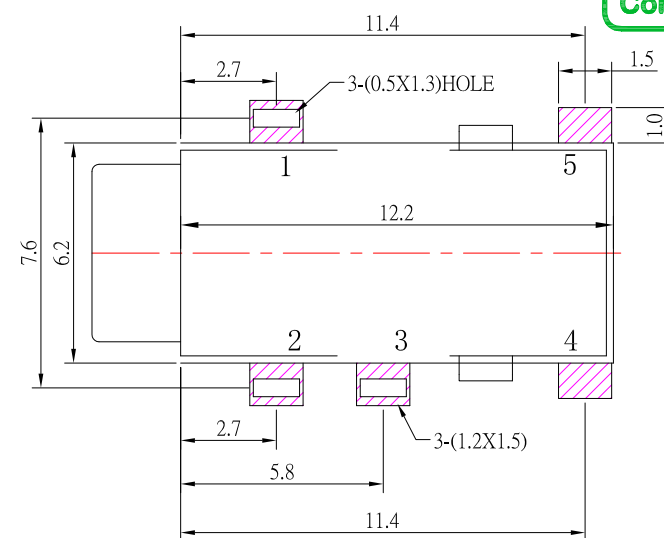
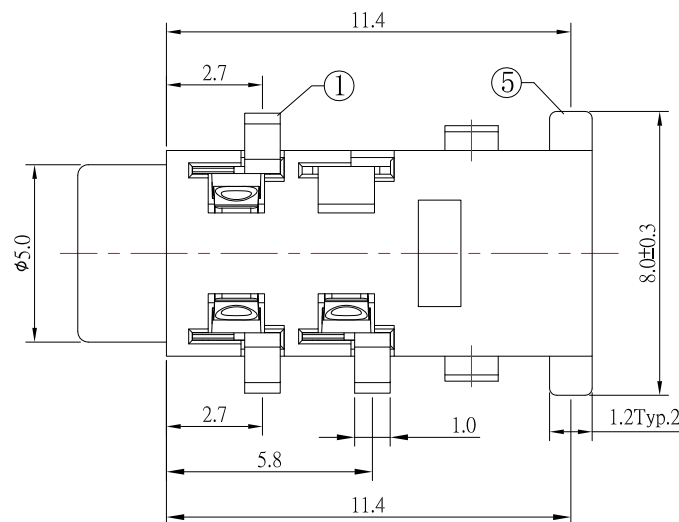
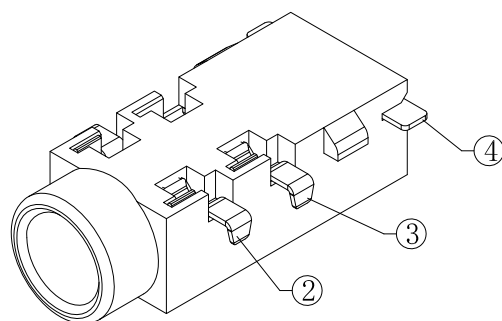


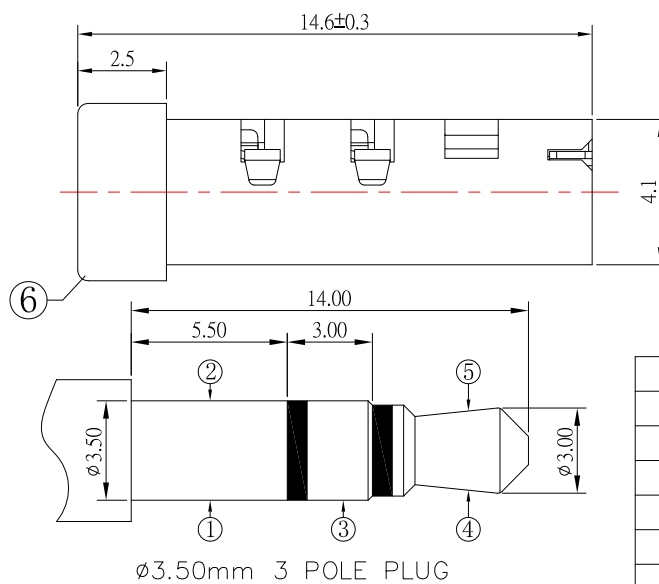

P.C.B LAYOUT
TOP VIEW

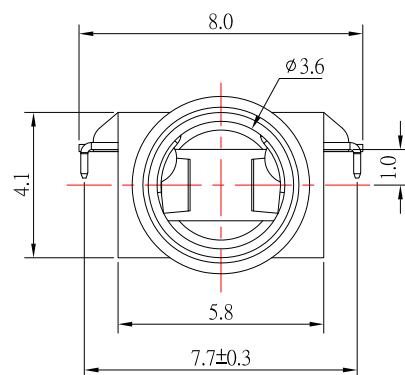

3.50mm 3 POLE PLUG



SCHEMATIC

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 0.03 \Omega$;
- Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles °

6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/21/19		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH		
Jacky Chen	08/21/19	SCALE	DWG NO.	PJ-S3112A1-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-S3112A1-S124
Tony Kao	08/21/19	1 of 1		

ITEM NO	DESCRIPTION	DRAWN	DATE
3	更新樣式	Jack	082119
2	更新尺寸	Jack	080519
1	新增PLUG	Jack	121318