

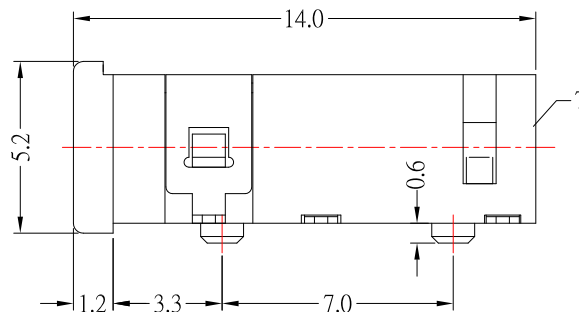


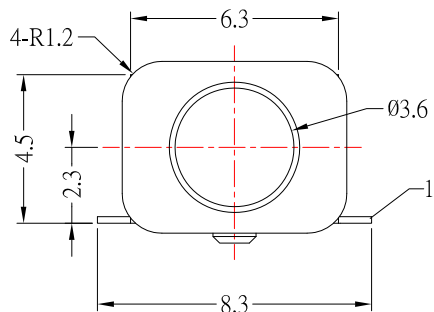


P.C.B LAYOUT
TOP VIEW

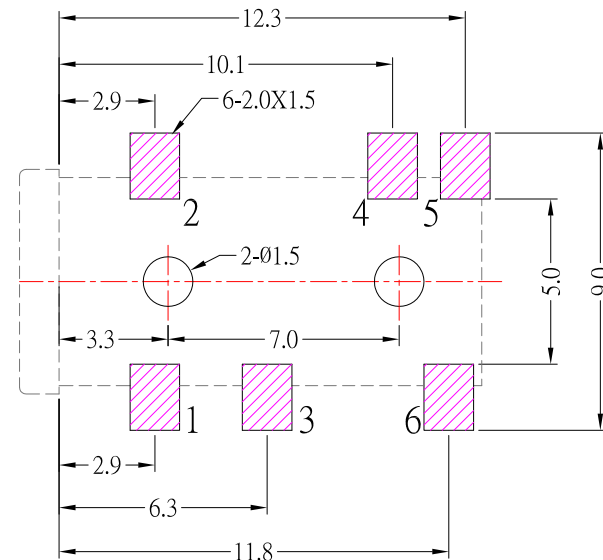



SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

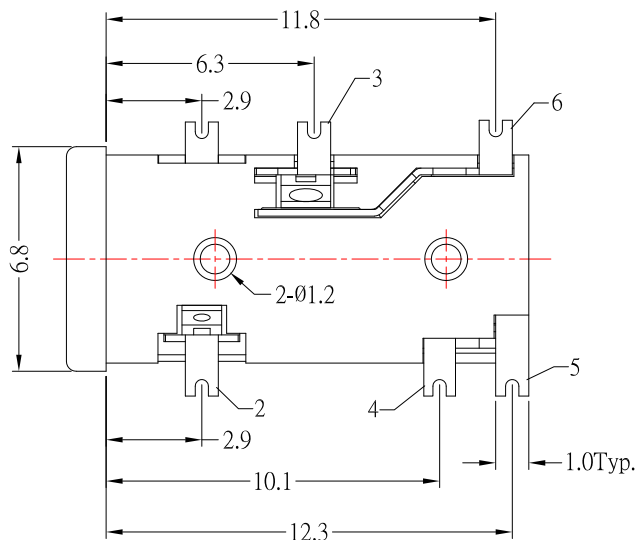

SCHEMATIC

PJ-S3141	PJ-S3141-1	PJ-S3141-2	PJ-S3141-3	PJ-S3141-4

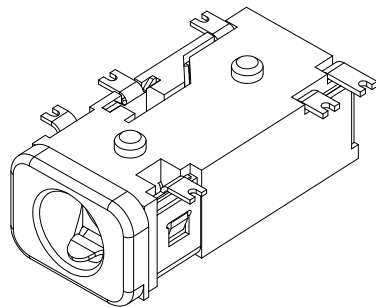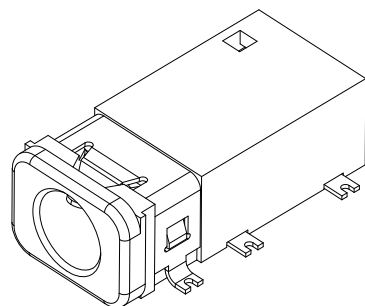

7	HOUSING	1	PA9T	
6	CONTACT FOOT #6	1	BRASS	Ag-Plating
5	CONTACT FOOT #5	1	BRASS	Ag-Plating
4	CONTACT FOOT #4	1	PHOPSHOR BRONZE	Ag-Plating
3	CONTACT FOOT #3	1	PHOPSHOR BRONZE	Ag-Plating
2	CONTACT FOOT #2	1	PHOPSHOR BRONZE	Ag-Plating
1	CONTACT FOOT #1	1	PHOPSHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Frank Wu	06/05/12		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH		
Jacky Chen	06/05/12	SCALE	1 : 1	DWG NO. PJ-S3141-S125
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO. PJ-S3141-S125
Tony Kao	06/05/12			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------

A B C D E F G H I J