

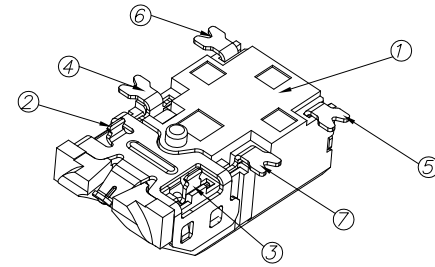
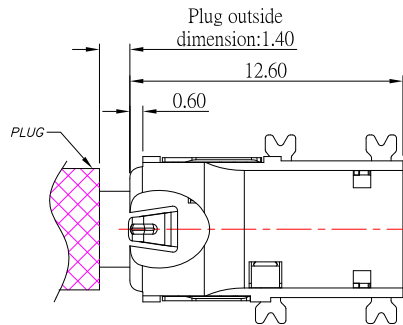

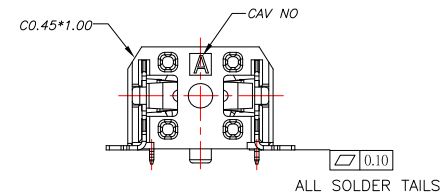


(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

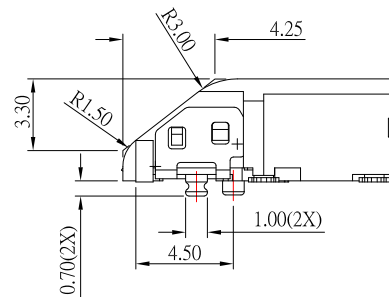


3D VIEW




SCHEMATIC

NOTES:

1. CONTACT CURRENT RATING:1.0 A.
2. CONTACT RESISTANCE: 50mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 6,000CYCLES.;
6. CONNECTOR MATING FORCES: 2.94~29.4N (0.30~3.00Kgf);
7. CONNECTOR UNMATING FORCES: 2.94~29.4N (0.30~3.00Kgf);

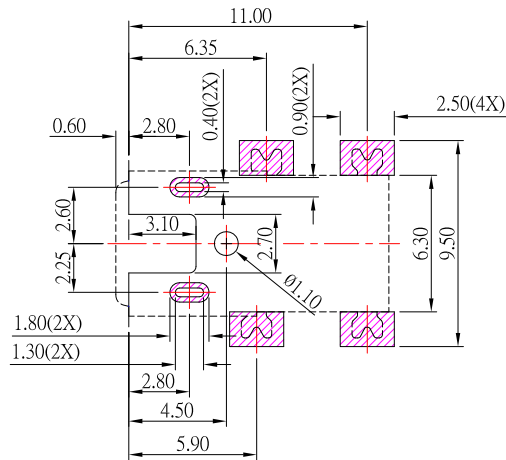

RECOMMENDED PCB LAYOUT

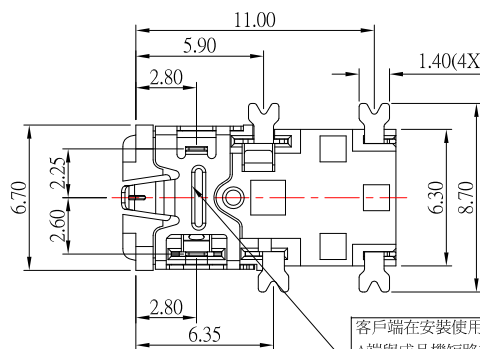

客戶端在安裝使用須防止
A端與成品機短路或造成
信號干擾

01	HOUSING	1 PCS	HIGHT TEMPERATURE PLASTIC	BLACK COLOR	UL94V-0
02	CONTACT A	1 PCS	PHOSPHOR BRONZE	Au Plated	
03	CONTACT B	1 PCS	PHOSPHOR BRONZE	Au Plated	
04	CONTACT C	1 PCS	PHOSPHOR BRONZE	Au Plated	
05	CONTACT D	1 PCS	STAINLESS STEEL	Au Plated	
06	CONTACT E	1 PCS	STAINLESS STEEL	Au Plated	
07	CONTACT F	1 PCS	BRASS	Au Plated	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/12/14	FINISH	MODLE	3.5MM PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-30268-65-S119
Jacky Chen	06/12/14	1 : 1	PART NO.	PJ-30268-65-S119
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/12/14			



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

1	更新圖面	Jack	061214
ITEM NO.	DESCRIPTION	DRAWN	DATE