

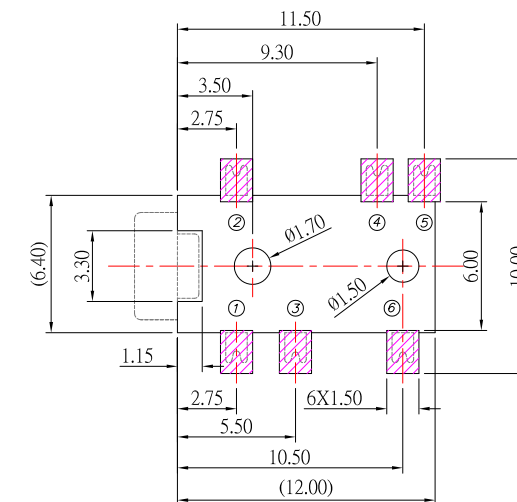



SCHEMATIC



RECOMMENDED PCB LAYOUT
TOP VIEW

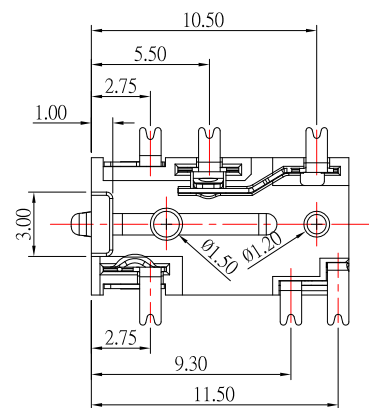

NO SPIGOT

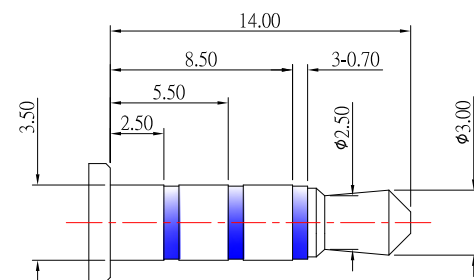

(3.5mm 4 POLE PLUG DETAIL DRAWING)

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 10,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Frank Wu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
12/22/11
DATE
12/22/11
DATE
12/22/11

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-30266-61-S119
PJ-30266-61-S119

SIZE
A4
VER
A

ITEM NO.	DESCRIPTION	DRAWN	DATE