
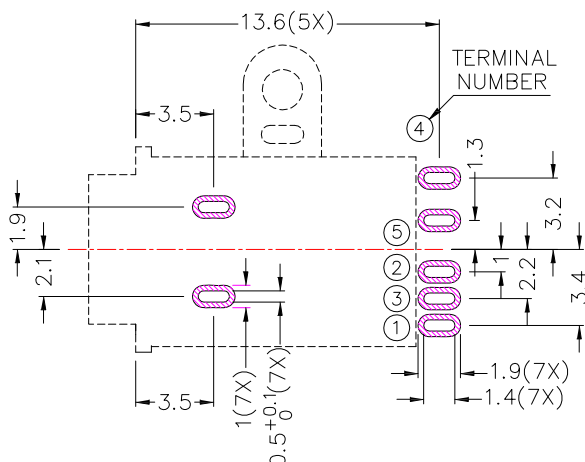


SPECIFICATION



- 1.Rating :DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles
- 7.Waterproof Lever: IPX7

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 5 : PHOSPHOR BRONZE
SHIELD : STAINLESS STEEL
SUPPORT : BRASS
HOUSING : PA10T
COVER : PA10T

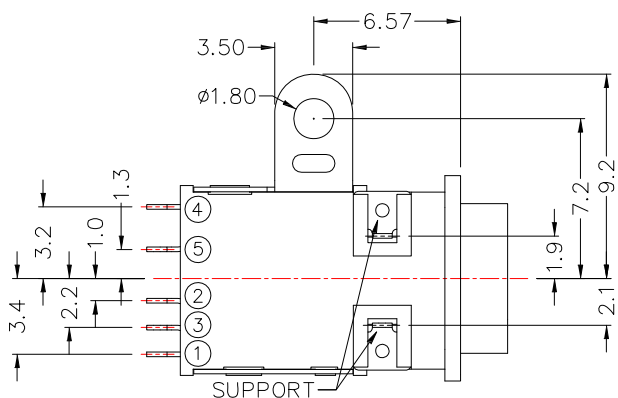

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)



 东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/08/16	FINISH	MODLE	3.5mm PHONE JACK 防水型
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-WP3004S
Jacky Chen	01/08/16	1 : 1	PART NO.	PJ-WP3004S
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	01/08/16			

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SPEC	Jack	010816