
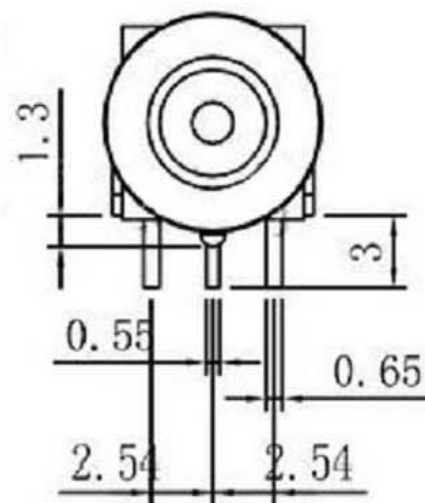


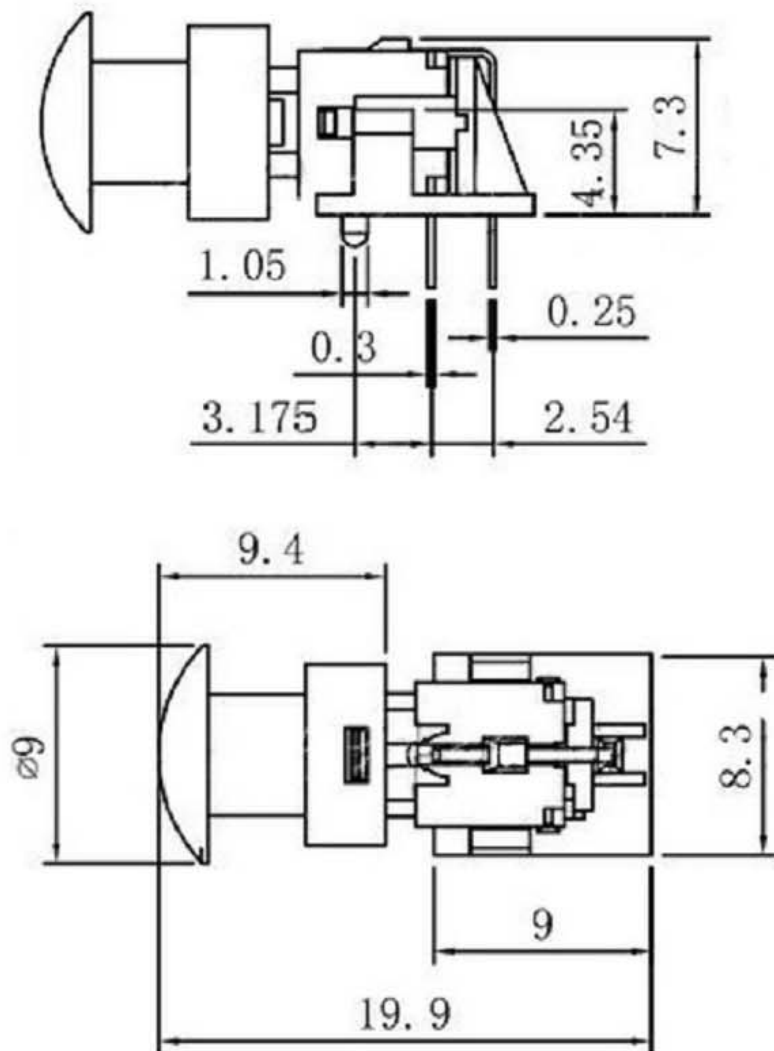

SPECIFICATIONS

1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

	东莞市高迪电子有限公司					9							
	TITLE : LLLUMINATED TACTILE SWITCH					8							
	MODEL :					7							
	DRAWING NO. : _					6	CAP	ABS/PC	1	SLIVER /BLACK			
	UNIT : M M		DWN.	LSX	2015-02-18	GENERAL TOLERANCE		5	CONTACT	PBS	1	Ag CLAD	
	SCALE : 5 : 1		CHK'D	LJ	2015-02-18	WITHIN 1.5mm±0.1mm		4	TERMINAL	BRASS STRIP	4	Ag PLATED	
	LEVEL 1		REV R1	APPD.	CC	2015-02-18	OVER 1.5mm±0.2mm		3	BASE	PA66	1	BLACK
									2	COVER	PET	1	NATURAL
								1	KNOB	PA66	1	WHITE	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	