

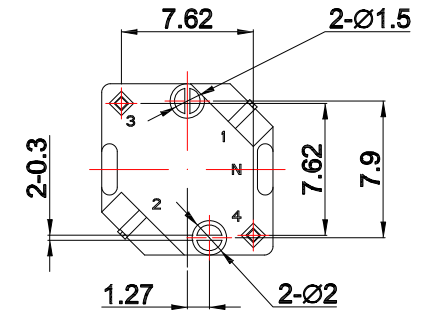
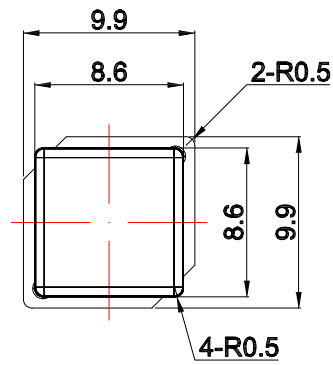


P.C.B LAYOUT

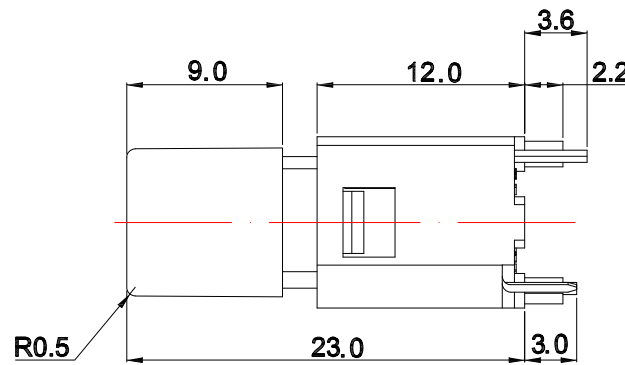

SPECIFICATIONS

Rating	DC 20V 1mA
Contact Resistance	200 mΩ Max.
Insulation Resistance	100 MΩ Min.
Operating Temperature	-40°C ~ +85°C
Operating Force	125 ± 35gf
Operating Life (cycles)	300,000

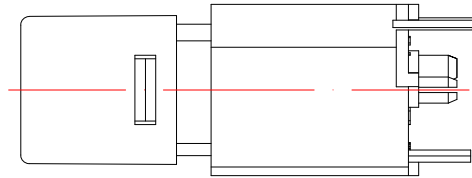

TS-H3-xx-C0xx-S065

COLOR OF LED


0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

CAP MODEL

S1	6.0mm Sq
S2	8.6mm Sq
S2A	8.6mm Sq
S3	11.0mm Sq
S3A	12.5mm Sq
S4	11.0mm Sq

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black	8	White



SCHEMATIC



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 02/09/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH W/I LED
TS-H3-xx-C0xx-S065
TS-H3-xx-C0xx-S065

SIZE
A4
VER
R