
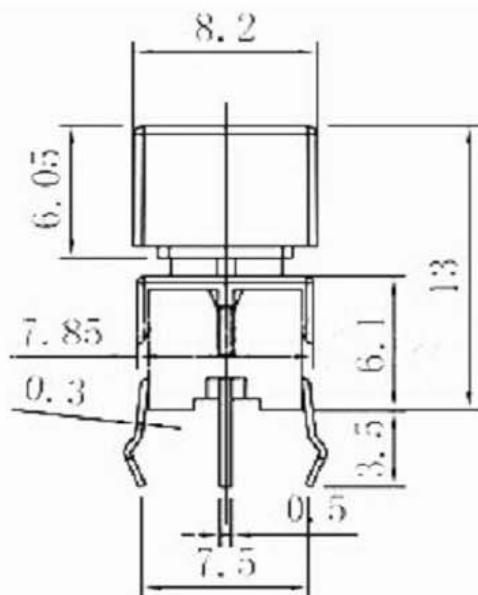




P. C. B. Land Pattern

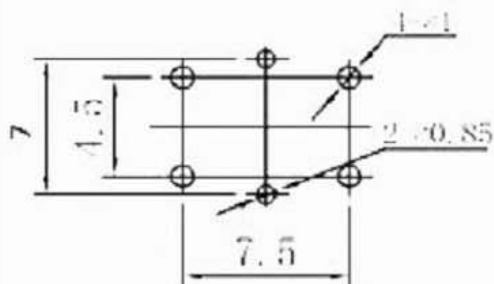

SCHEMATIC

### SPECIFICATIONS

1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

|               |                                   |       |            |                    |                  |     |           |             |      |               |
|---------------|-----------------------------------|-------|------------|--------------------|------------------|-----|-----------|-------------|------|---------------|
|               | <b>东莞市高迪电子有限公司</b>                |       |            |                    |                  | 9   |           |             |      |               |
|               | TITLE : LLUMINATED TACTILE SWITCH |       |            |                    |                  | 8   |           |             |      |               |
|               | MODEL :                           |       |            |                    |                  | 7   |           |             |      |               |
|               | DRAWING NO. : _                   |       |            |                    |                  | 6   | CAP       | ABS/PC      | 1    | SLIVER /BLACK |
|               |                                   |       |            |                    |                  | 5   | CONTACT   | PBS         | 1    | Ag CLAD       |
|               |                                   |       |            |                    |                  | 4   | TERMINAL  | BRASS STRIP | 4    | Ag PLATED     |
|               |                                   |       |            |                    |                  | 3   | BASE      | PA66        | 1    | BLACK         |
|               |                                   |       |            |                    |                  | 2   | COVER     | PET         | 1    | NATURAL       |
|               |                                   |       |            |                    |                  | 1   | KNOB      | PA66        | 1    | WHITE         |
| UNIT : M M    | DWN.                              | LSX   | 2015-02-18 | GENERAL TOLERANCE  |                  | NO. | PART NAME | MATERIAL    | QTY. | FINISHING     |
| SCALE : 5 : 1 | CHK'D                             | LJ    | 2015-02-18 | WITHIN 1.5mm±0.1mm |                  |     |           |             |      |               |
| LEVEL 1       | REV R1                            | APPD. | CC         | 2015-02-18         | OVER 1.5mm±0.2mm |     |           |             |      |               |