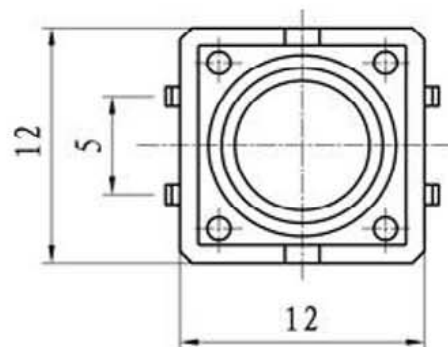
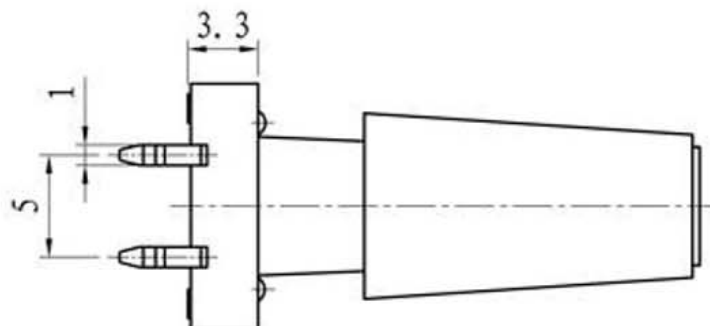
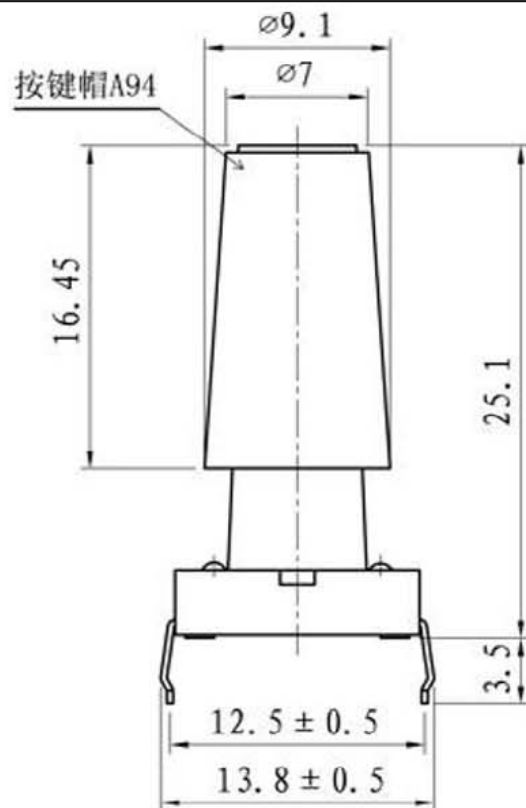


SCHEMATIC

#### SPECIFICATIONS


1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

### 东莞市高迪电子有限公司

TITLE : TACTILE SWITCH

MODEL :

DRAWING NO. : \_



|               |        |       |            |                      |     |           |             |      |               |
|---------------|--------|-------|------------|----------------------|-----|-----------|-------------|------|---------------|
| UNIT : M M    | DWN.   | LSX   | 2015-02-18 | GENERAL TOLERANCE    | 9   |           |             |      |               |
| SCALE : 5 : 1 | CHK' D | LJ    | 2015-02-18 | WITHIN 1.5mm ± 0.1mm | 8   |           |             |      |               |
| LEVEL 1       | REV R1 | APPD. | 2015-02-18 | OVER 1.5mm ± 0.2mm   | 7   |           |             |      |               |
|               |        |       |            |                      | 6   | CAP       | ABS/PC      | 1    | SLIVER /BLACK |
|               |        |       |            |                      | 5   | CONTACT   | PBS         | 1    | Ag CLAD       |
|               |        |       |            |                      | 4   | TERMINAL  | BRASS STRIP | 4    | Ag PLATED     |
|               |        |       |            |                      | 3   | BASE      | PA66        | 1    | BLACK         |
|               |        |       |            |                      | 2   | COVER     | PET         | 1    | NATURAL       |
|               |        |       |            |                      | 1   | NOB       | PA66        | 1    | WHITE         |
|               |        |       |            |                      | NO. | PART NAME | MATERIAL    | QTY. | FINISHING     |