


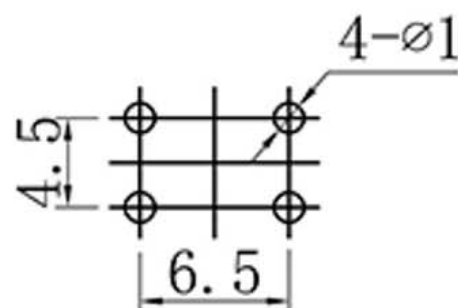
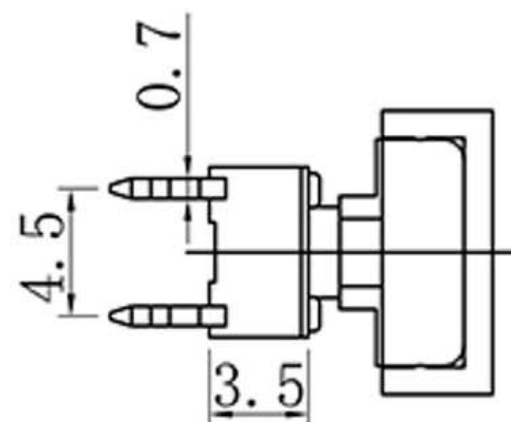


外盖: A66透明盖


内盖: A66平脚

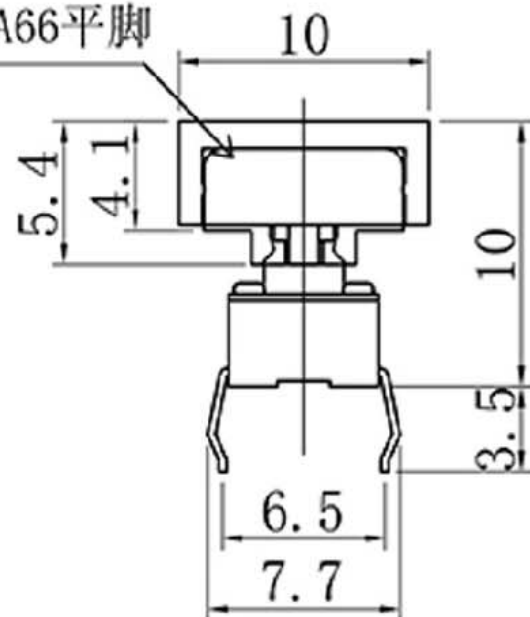

SCHEMATIC

SPECIFICATIONS

1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

 东莞市高迪电子有限公司						9				
						8				
						7				
						6	CAP	ABS/PC	1	SLIVER /BLACK
	TITLE : TACTILE SWITCH					5	CONTACT	PBS	1	Ag CLAD
	MODEL :					4	TERMINAL	BRASS STRIP	4	Ag PLATED
	DRAWING NO. : _					3	BASE	PA66	1	BLACK
						2	COVER	PET	1	NATURAL
UNIT : M M	DWN.	LSX	2015-02-18	GENERAL TOLERANCE		1	NOB	PA66	1	WHITE
SCALE : 5 : 1	CHK' D	LJ	2015-02-18	WITHIN 1.5mm±0.1mm						
LEVEL 1	REV R1	APPD.	CC	2015-02-18	OVER 1.5mm±0.2mm					
						NO.	PART NAME	MATERIAL	QTY.	FINISHING