

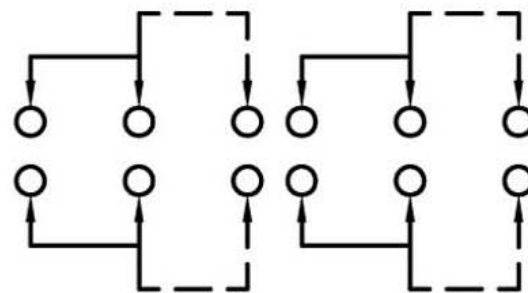


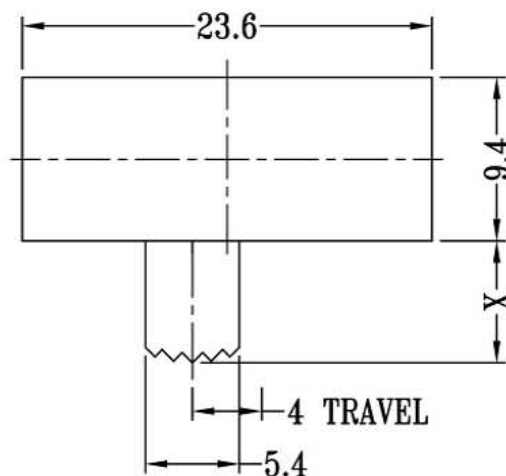

Technical drawing of a rectangular component. The overall width is 23.1 and the overall height is 15.2. The component has a central rectangular feature with a width of 2. The distance from the left edge to the center of this feature is 4. The distance from the center of the feature to the right edge is 18. The component has a central slot with a width of 0.5 THK. The distance from the right edge to the center of the slot is 0.5.

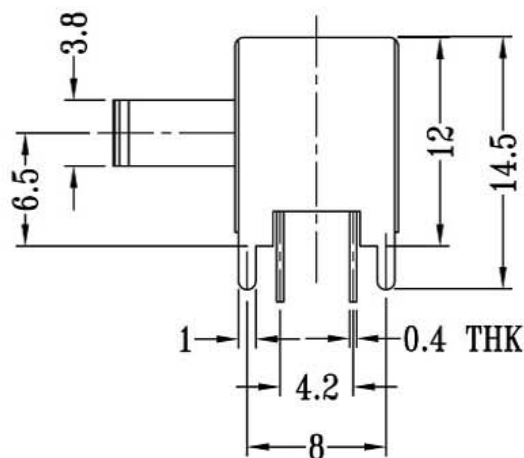

SCHEMATIC (NON-SHORTING)

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^{\circ}\text{C}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%\text{RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

注:“*”表示关键尺寸(6个)

8				TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN	A	2012-12-25	初板		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD
4	TERMINAL	BRASS STRIP	10	Ag PLATED	TITLE: HORIZONTAL SLIDE SWITCH			UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	BLACK	MODEL:			SCALE: 2:1	DWN	2012-12-25
2	FRAME	STEEL STRIP	1	Ni PLATED					CHK'D	
1	KNOB	POM	1	BLACK					APPD	2012-12-25
NO.	PARTS	MATERIALS	QTY	FINISH	 东莞市高迪电子有限公司					