





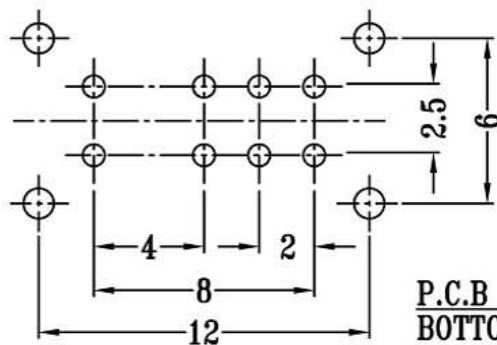

Technical drawing of a cross-section of a mechanical component. The drawing shows a cylindrical part on the left with a diameter of 4. The main body is a rectangular block with a total width of 6 and a total height of 12.2. The block has a central vertical slot with a width of 2.5. The slot is flanked by two vertical sections, each with a thickness of 0.5 THK. The bottom of the slot is rounded. The right side of the block has a vertical section with a thickness of 0.4 THK. The drawing includes dimension lines and arrows indicating the measurements.

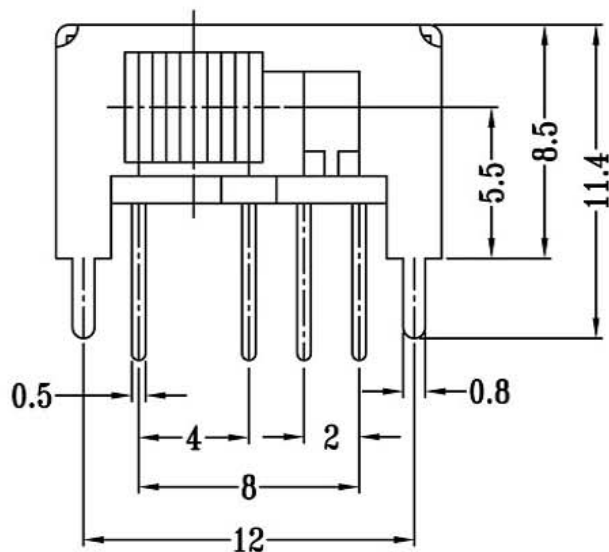

SCHEMATIC (SHORTING)

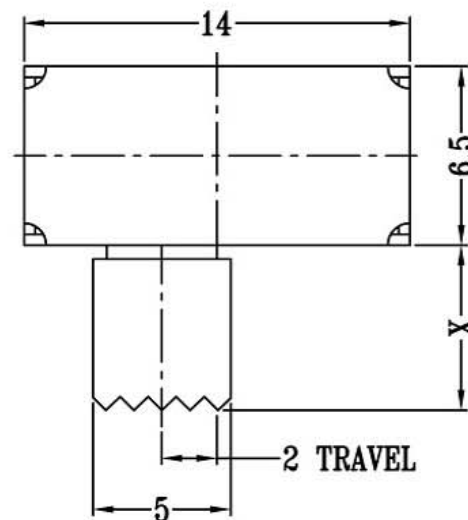

P.C.B LAYOUT BOTTOM VIEW

注:“*”表示关键尺寸(6个)

拨动开关侧拨技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ \text{C}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力 : 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8				TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN	A	2012-12-25	初板		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD
4	TERMINAL	BRASS STRIP	10	Ag PLATED	TITLE: HORIZONTAL SLIDE SWITCH			UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	BLACK	MODEL:			SCALE: 2:1	DWN	2012-12-25
2	FRAME	STEEL STRIP	1	Ni PLATED					CHK'D	
1	KNOB	POM	1	BLACK					APPD	2012-12-25
NO.	PARTS	MATERIALS	QTY	FINISH	 东莞市高迪电子有限公司					