

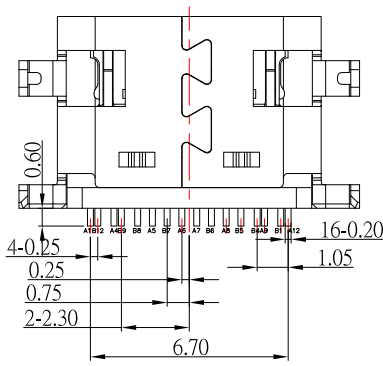
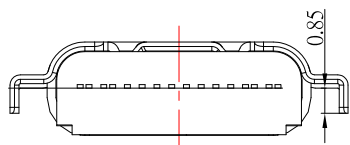
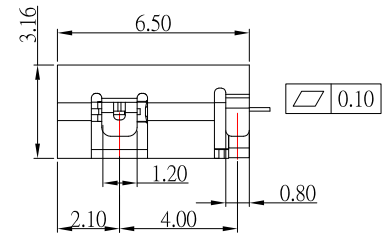
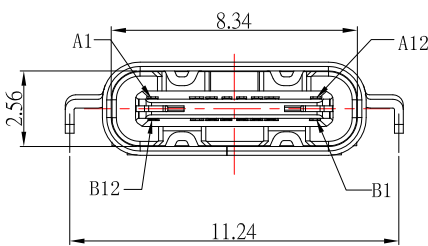
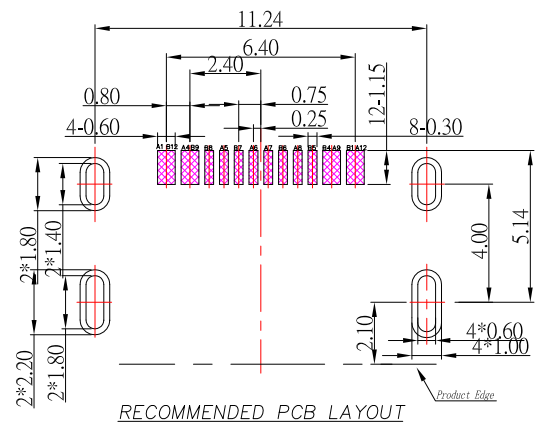


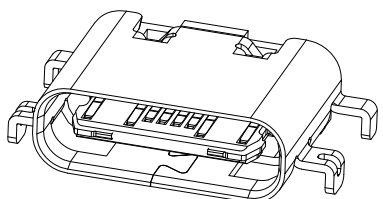

SBC-160M6H-20x-S235

鍍層厚度：

|             |
|-------------|
| Blank : 1u" |
| 2 : 15u"    |
| 3 : 30u"    |

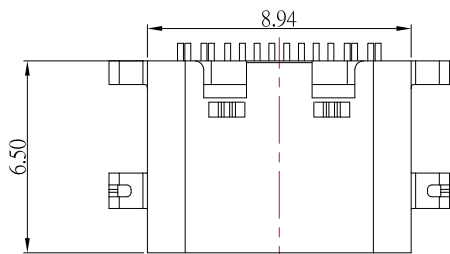

|     |             |     |             |
|-----|-------------|-----|-------------|
| A1  | GND         | B12 | GND         |
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

SPECIFICATIONS

Electrical:

- Rating: 100V AC , 1.5 A
- Contact Resistance: 40 mΩ Max
- Insulation Resistance: 100 MΩ Min

Mechanical:

- Connector Mate and Unmate Force
  - Mate force: 5~20 N
  - Unmate force: 8~20 N

Material:

- Housing: LCP
- Contact: Copper Alloy
- Shell: SUS

Finish:

- Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls ;  
Nickel under plated overall
- Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

04/11/19

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

04/11/19

FINISH

MODLE

USB TYPE C 2.0 沉板 1.6mm 高導電銅

APPROVED BY:

Tony Kao

DATE

04/11/19

SCALE

1 : 1

DWG NO.

SBC-160M6H-20x-S235

SIZE

A4

SHEET NO.

1 of 1

PART NO.

SBC-160M6H-20x-S235

VER

R2

|          |             |       |        |
|----------|-------------|-------|--------|
| 2        | 更新樣式        | Jack  | 041119 |
| 1        | 更新為A0版      | Jack  | 073018 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE   |