



Technical drawing of a mechanical assembly, likely a valve or actuator, showing two views with dimensions in inches.

Top View (Plan View):



- Overall width: 12.2
- Overall height: 5.6
- Distance from top edge to centerline: 4.9
- Distance from left edge to centerline: 6.1 (labeled as 0.8 + 3)
- Distance from centerline to right edge: 3
- Distance from left edge to right edge: 6

Bottom View (Side View):


- Overall width: 12.2
- Overall height: 5.6
- Distance from top edge to centerline: 4.9
- Distance from centerline to bottom edge: X
- Distance from left edge to centerline: 6.1 (labeled as 0.8 + 3)
- Distance from centerline to right edge: 3
- Distance from left edge to right edge: 6

Labels:

- 0.8
- 3
- 6
- 12.2
- 5.6
- X
- 3 TRAVEL

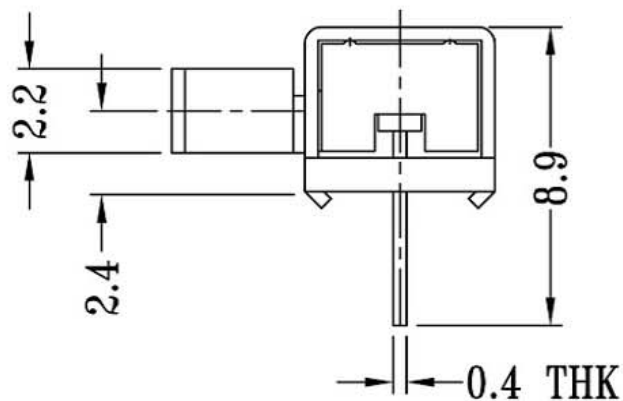

P.C.B LAYOUT
BOTTOM VIEW

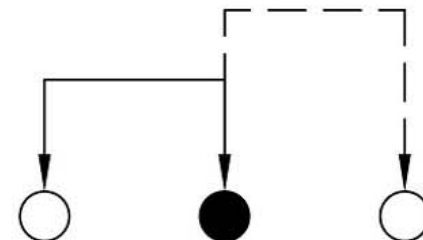

SCHEMATIC (NON-SHORTING)

拨动开关侧拨技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ \text{C}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力 : 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

注：“*”表示关键尺寸(6个)

8				TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN	A	2012-12-25	初板		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD
4	TERMINAL	BRASS STRIP	10	Ag PLATED	TITLE: HORIZONTAL SLIDE SWITCH			UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	BLACK	MODEL:			SCALE: 2:1	DWN	2012-12-25
2	FRAME	STEEL STRIP	1	Ni PLATED					CHK'D	
1	KNOB	POM	1	BLACK					APPD	2012-12-25
NO.	PARTS	MATERIALS	QTY	FINISH	 东莞市高迪电子有限公司					