




Technical drawings of a mechanical part, showing front and side views with dimensions.

Front View (Left):

- Overall width: 4
- Overall height: 4.5
- Top flange thickness: 0.4 THK
- Bottom flange thickness: 0.5
- Internal feature width: 2

Side View (Right):



- Overall length: 8.6
- Overall height: 4.7
- Top flange thickness: 2
- Internal feature width: 2.7
- Bottom flange thickness: 0.3 THK



P.C.B LAYOUT BOTTOM VIEW

注:“*”表示关键尺寸(6个)

2 TRAVEL

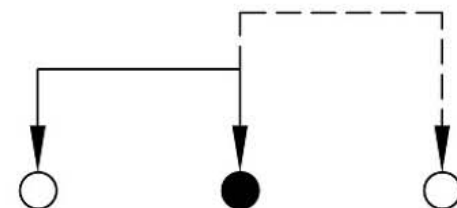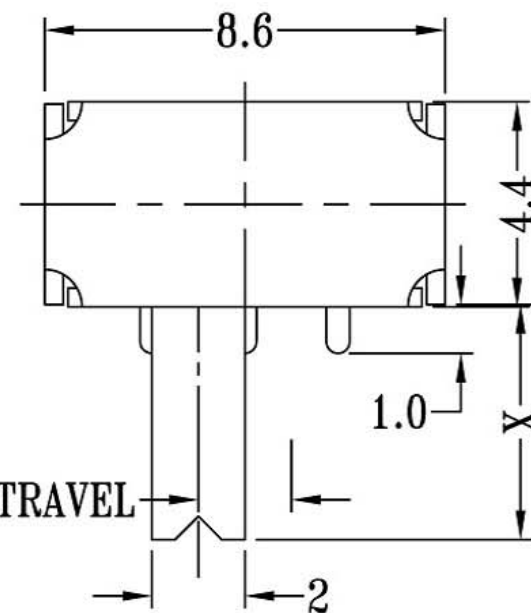

SCHEMATIC (NON-SHORTING)

拨动开关侧拨技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^{\circ}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%\text{RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8				TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN	A	2012-12-25	初板		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD
4	TERMINAL	BRASS STRIP	10	Ag PLATED	TITLE: HORIZONTAL SLIDE SWITCH			UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	BLACK	MODEL:			SCALE: 2:1	DWN	2012-12-25
2	FRAME	STEEL STRIP	1	Ni PLATED	 东莞市高迪电子有限公司			CHK'D		2012-12-25
1	KNOB	POM	1	BLACK				APPD		
NO.	PARTS	MATERIALS	QTY	FINISH						