




SBC-160S2H-20x-S235

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

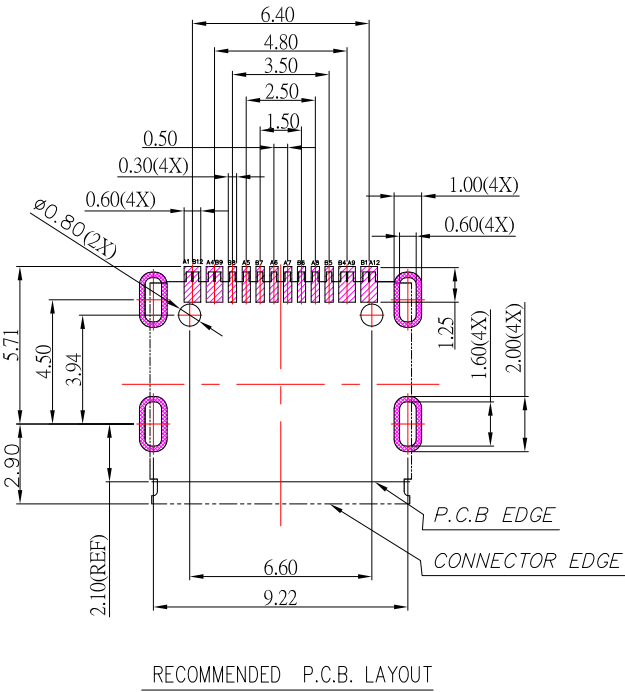

SPECIFICATIONS

Electrical:

- 1.Rating: 5.0 A
- 2.VOLTAGE: 5V
- 3.Dielectric Withstand Voltage: 100V AC
- 4.Contact Resistance: 40 mΩ Max
- 5.Insulation Resistance: 100 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/14/20
CHECKED BY:	DATE
Jacky Chen	01/14/20
APPROVED BY:	DATE
Tony Kao	01/14/20

MAT'L	
FINISH	
SCALE	1 : 1
SHEET NO.	1 of 1

TITLE	CONNECTOR
MODLE	USB 3.1 TYPE C 單排SMT墊高5.9 L 8.0mm 高導電銅
DWG NO.	SBC-160S2H-20x-S235
PART NO.	SBC-160S2H-20x-S235

SIZE
A4
VER
A5

6	新增尺寸	Jack	011420
5	新增尺寸	Jack	082018
4	更新樣式	Jack	031418
3	更新圖面	Jack	030918
2	更新料號	Jack	121917
1	更新為A0版	Jack	121317
ITEM NO.	DESCRIPTION	DRAWN	DATE